



# Bandpass Filter

KR Model 2335

Passband Amplitude

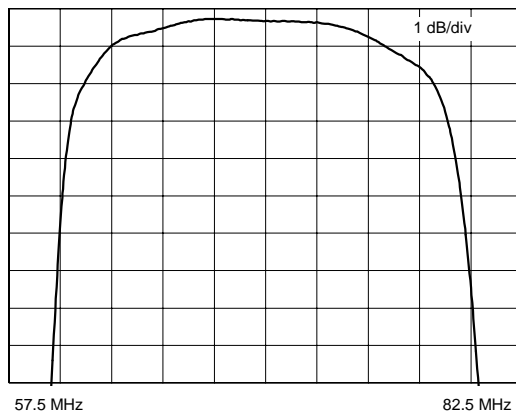


Overall Amplitude

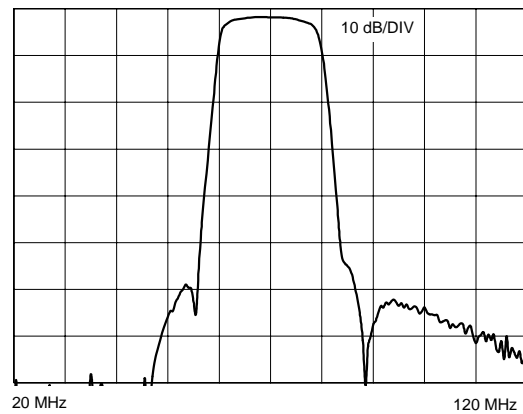

## Specifications

<b>KR Part Number</b>	<b>2335</b>
<b>Filter Type</b>	Bandpass
<b>Center Frequency</b>	70 MHz
<b>Insertion Loss</b>	< 3 dB
<b>40 MHz</b>	> 50 dB
<b>54 MHz</b>	> 40 dB
<b>56 MHz</b>	> 35 dB
<b>58 MHz</b>	> 25 dB
<b>66 MHz</b>	< 0.5 dB
<b>70 MHz</b>	Ref
<b>74 MHz</b>	< 0.5 dB
<b>82 MHz</b>	> 25 dB
<b>86 MHz</b>	> 40 dB
<b>100 MHz</b>	> 50 dB
<b>Source and Load Impedance</b>	75 Ω

## Outline Drawing

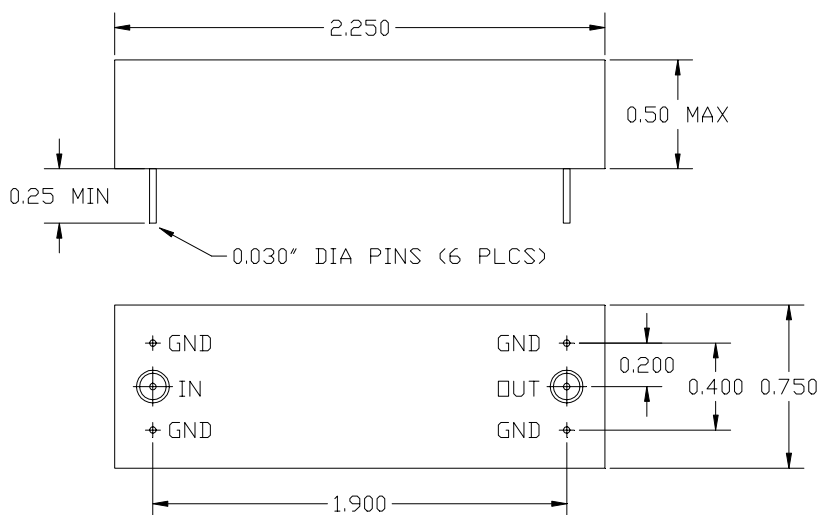

Dimensions in inches  
Metal Case

**KR Electronics**  
www.krfilters.com  
91 Avenel Street  
Avenel, NJ 07001  
732-636-1900