

KR Electronics, Inc.

General Description


KR Electronics part number 3102-2 is a 2 MHz highpass filter. The filter attains over 50 dB by 0.3 MHz. Other bandwidths are available. Please consult the factory.

Features

- 2 MHz Highpass Filter
- 50 Ω Source and Load
- BNC Connectors
- Also available in surface mount

Typical Performance

Overall Response
(10 dB/div)

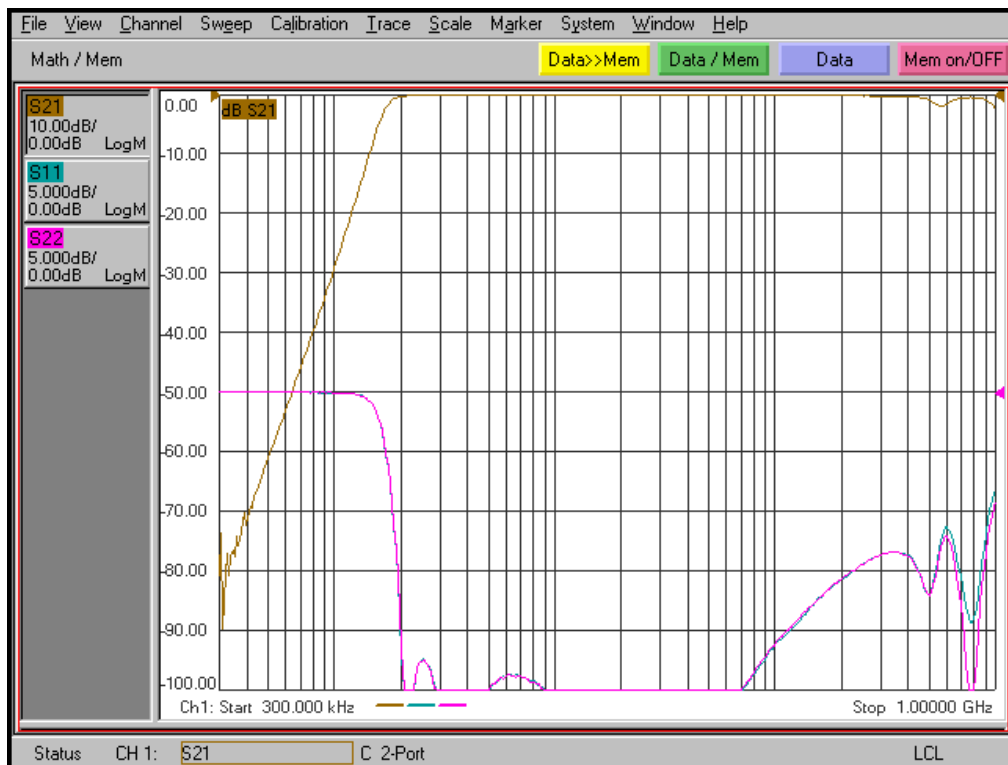

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics, Inc. 3102-2

Specifications

Parameter	Specification	Notes
Filter type	Highpass	
Start of Passband <1 dB	2 MHz	
Stopband Rejection dc to 0.3 MHz	50 dB min	75 dB typical
Source and Load	50 Ω	

Physical Dimensions

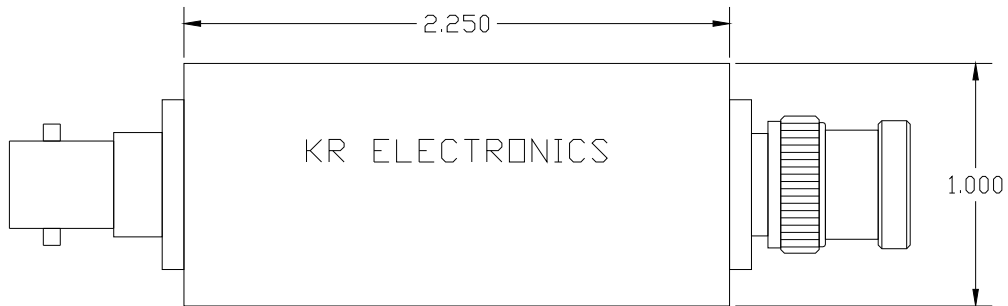

Notes:

1. Dimensions in inches
2. Rectangular case 1 x 1 2.25 inches
3. Connectors In/Out BNC(f)/BNC(m)