

General Description

KR Electronics part number 3165-SMA is a 189 MHz bandpass filter. The filter has a minimum 2 dB bandwidth of 58 MHz. Other frequencies are available. Please consult the factory.

Features

- 189 MHz Bandpass Filter
- 58 MHz min 2 dB Bandwidth
- Sharp Elliptic Type Response
- 50 Ω Source and Load
- SMA Connectors
- Surface Mount Available


Typical Performance

Overall Response (10 dB/div)



KR Electronics 3165-SMA

Passband Amplitude & Group Delay (1 dB/div & 10 nsec/div)

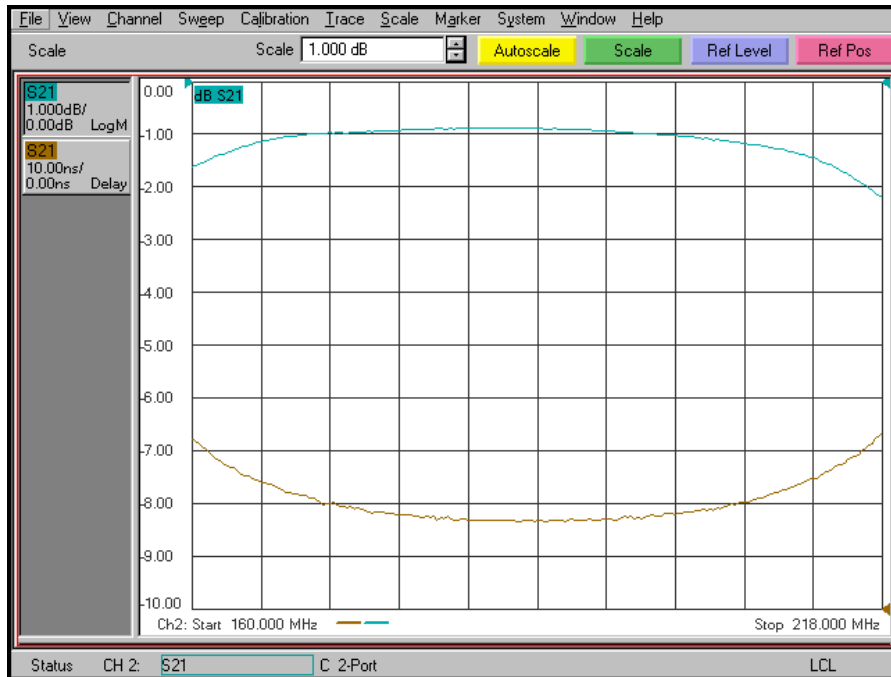

Overall Response (10 dB/div)



KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web: www.krfilters.com
Email: sales@krfilters.com
Phone: (732) 636-1900
Fax: (732) 636-1982

KR Electronics 3165-SMA

Specifications

Parameter	Specification	Notes
Filter type	Bandpass	
Center Frequency	189 MHz	
Insertion Loss	2.5 dB max	1 dB typical
1 dB Bandwidth	57 MHz typical	
2 dB Bandwidth	58 MHz min	64 MHz typical
3 dB Bandwidth	67 MHz typical	
40 dB Bandwidth	95 MHz max	
Source and Load	50 Ω	

Physical Dimensions

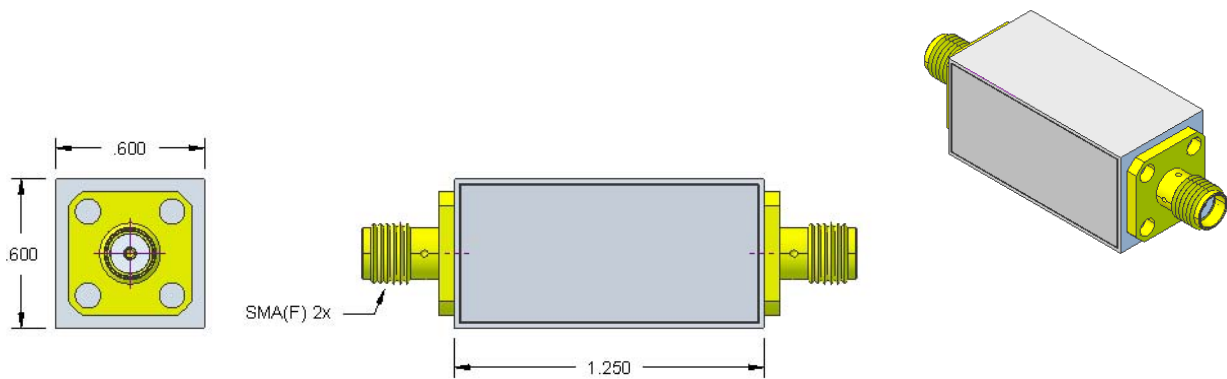

Notes:

1. Dimensions in inches
2. Rectangular case
3. Also available in a surface mount package—see part number 3165

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982