

KR 2434-5 Lowpass Filter

General Description

KR 2434-5 is a surface mount low-pass filters. Other passband frequencies are available. Please consult the factory.



Features

- Surface Mount Package
- 2:1 Transition to Stopband
- 55 dB Stopband
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay
(0.5 dB/div and 20 nsec/div)

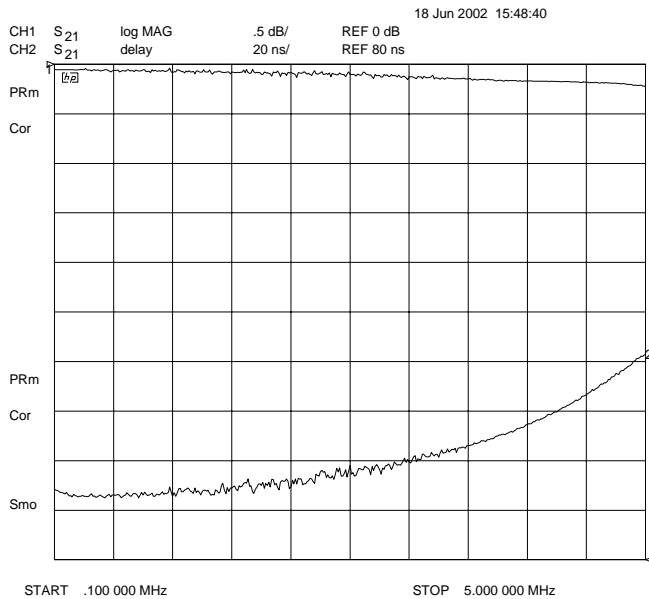


Figure 1

Overall Response
(10 dB/div)

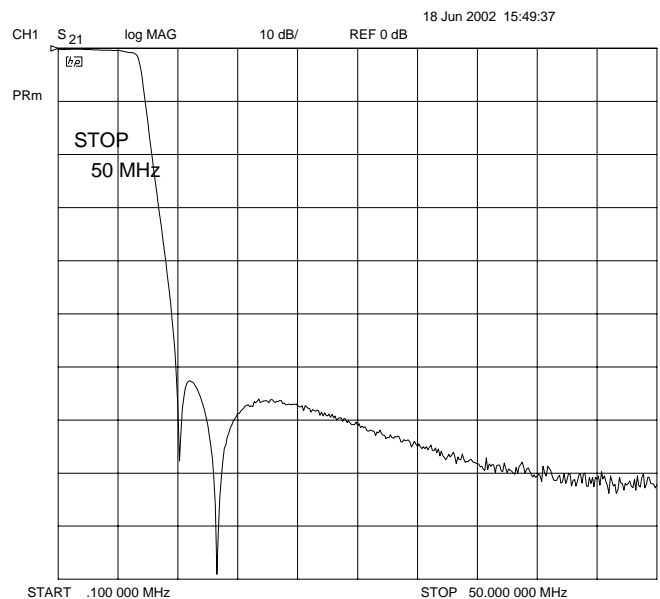


Figure 2

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2434-5 Lowpass

Specifications

Parameter	Specification
Filter type	Lowpass
End of Passband Fc (< 0.5 dB)	5 MHz
Attenuation at 2 x Fc	> 55 dB
Source & Load	50 Ω
VSWR	< 1.2 Typical

Physical Dimensions

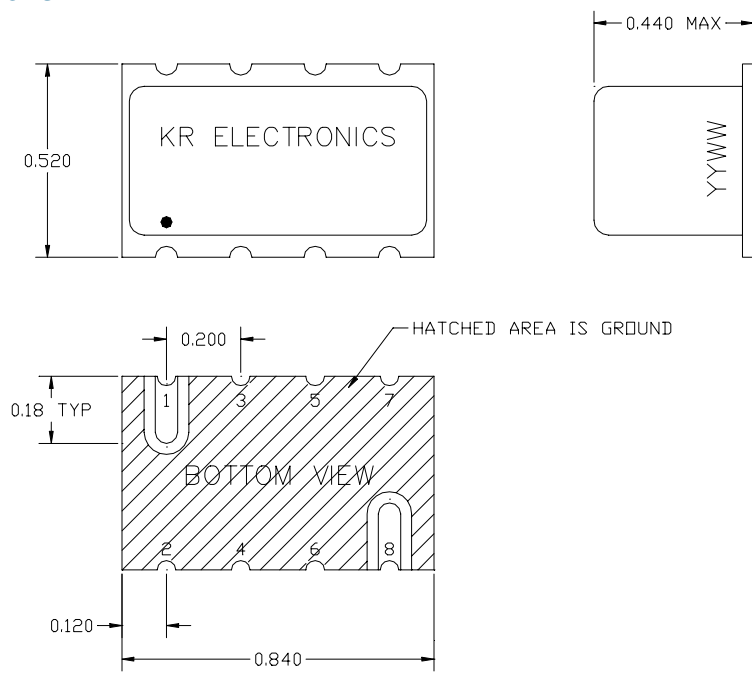

- NOTES:
 1. INPUT IS 1
 2. OUTPUT IS 8
 3. ALL OTHERS ARE GROUND

KR Electronics, Inc.
 91 Avenel Street
 Avenel, NJ 07001

Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982