

# KR Electronics

## General Description


KR 2898 is a 75 MHz bandpass filter. The filter has a minimum 1 dB bandwidth of 16 MHz. Other passband frequencies are available. Please consult the factory.

### Features


- 75 MHz Center Frequency
- 16 MHz min 1 dB Bandwidth
- SMA Connectors
- 50  $\Omega$  Source and Load

## Typical Performance

### Passband Amplitude & Group Delay (1 dB/div and 10 nsec/div)

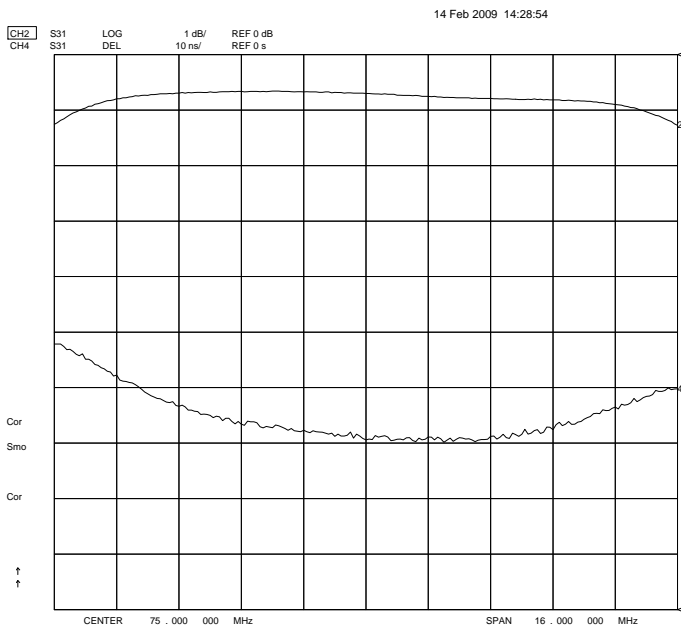

### Overall Response (10 dB/div)

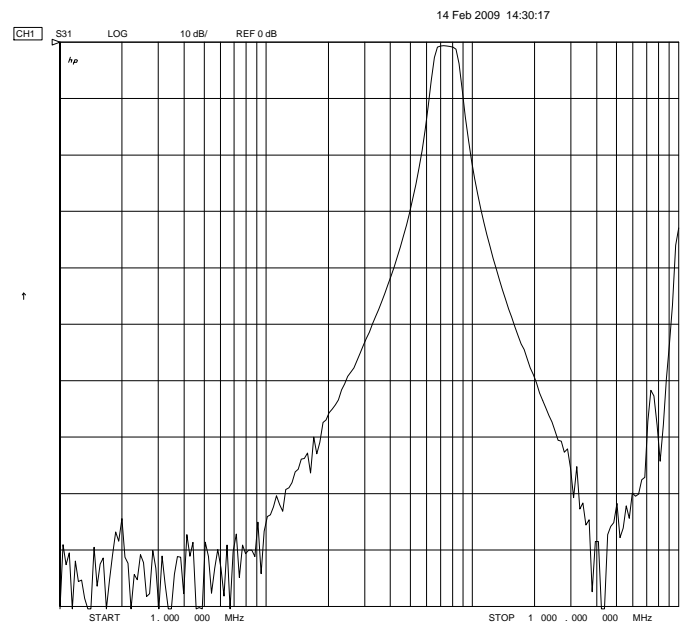

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2898

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	75 MHz
Insertion Loss	< 3 dB (< 1 dB typical)
1 dB Bandwidth	16 MHz min
3 dB Bandwidth	21 MHz typical
40 dB Bandwidth	91 MHz typical
60 dB Bandwidth	182 MHz typical
Source and Load	50 $\Omega$

## Physical Dimensions

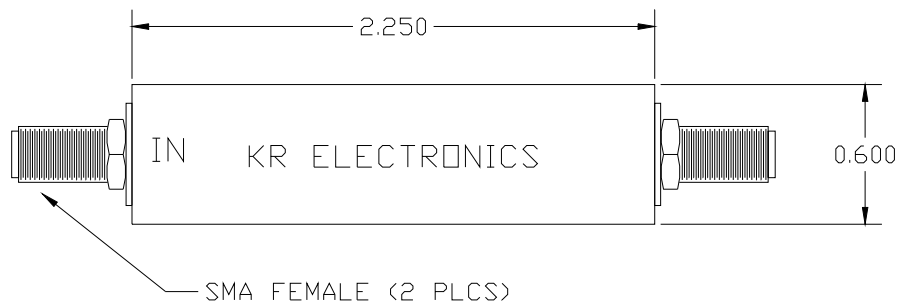

Dimensions in inches  
Metal Case

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982