

KR Electronics, Inc.

General Description


KR Electronics part number 3019 is a 11.5 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 400 KHz. Other center frequencies and bandwidths are available. Please consult the factory.

Features

- 11.5 MHz Bandpass
- 400 KHz min 3 dB BW
- 50 Ω Source and Load
- SMA Connectors

Typical Performance

Overall Response (10 dB/div)

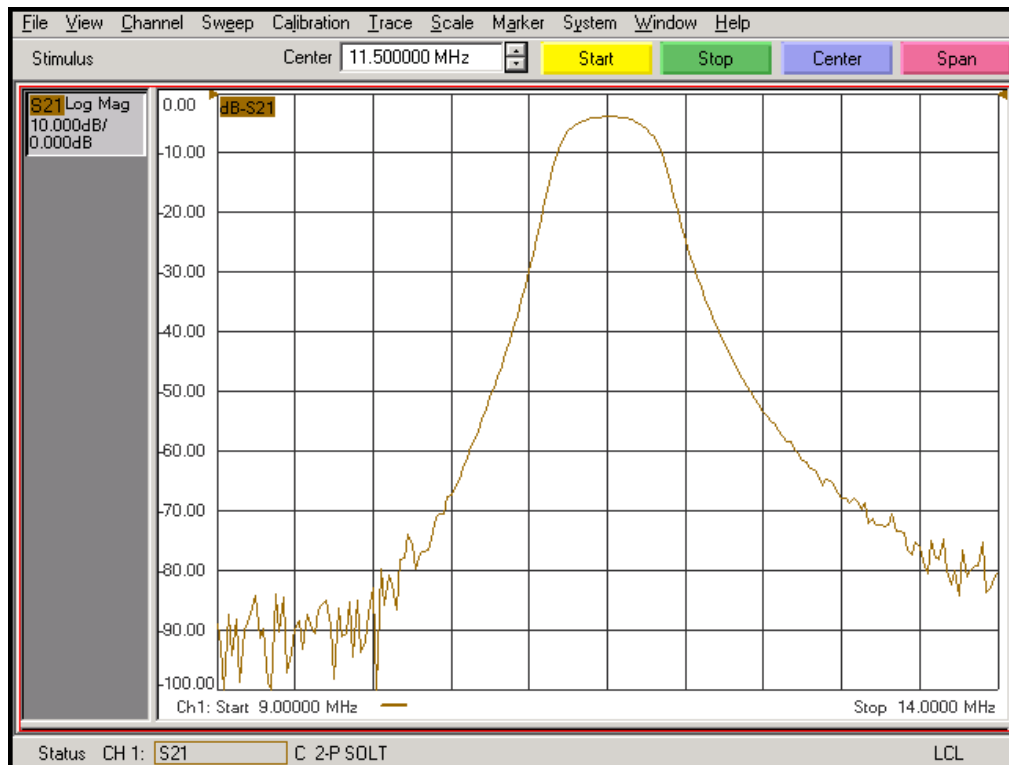


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

Typical Performance

Passband Amplitude & Group Delay (1 dB/div & 200 nsec/div)

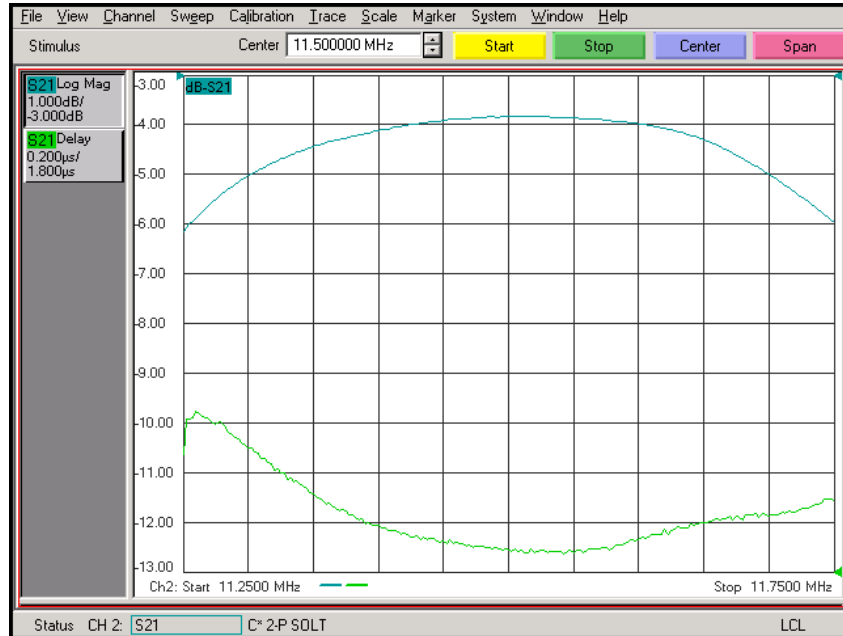

Overall Response (6 dB/div)

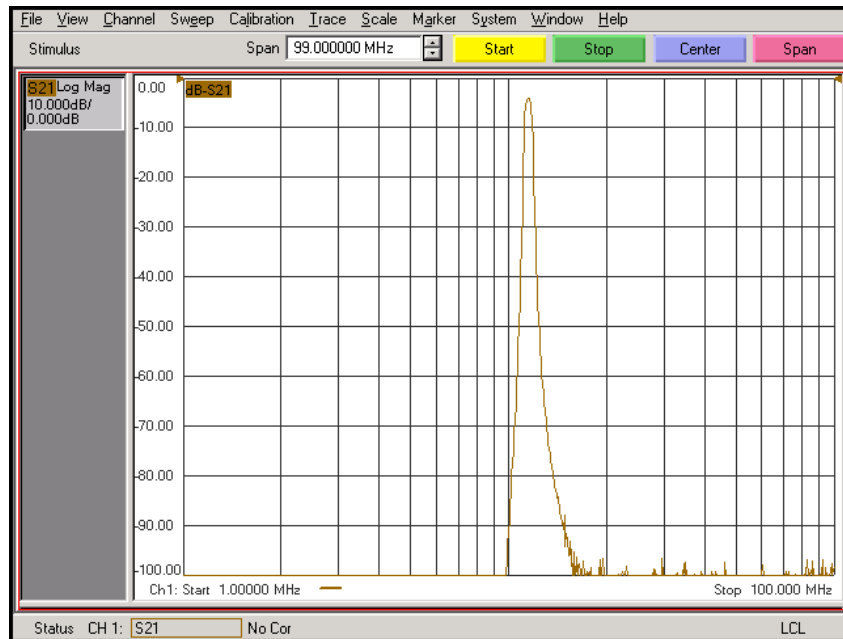

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web: www.krfilters.com
Email: sales@krfilters.com
Phone: (732) 636-1900
Fax: (732) 636-1982

KR Electronics 3019

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	11.5 MHz
Insertion Loss	4 dB typical
3 dB Bandwidth	0.400 MHz min
20 dB Bandwidth	0.74 MHz typical
40 dB Bandwidth	1.45 MHz typical
60 dB Bandwidth	2.3 MHz typical
Source and Load	50 Ω

Physical Dimensions

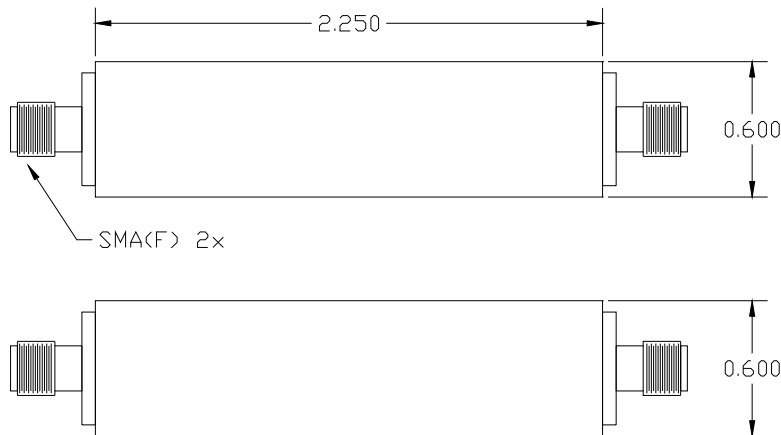

- Notes:
1. Dimensions in inches
 2. Rectangular case

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982