

# KR 2464 Bandpass Filter

## General Description


KR 2464 is a 550 MHz bandpass filter. The minimum 3 dB bandwidth is 102 MHz. Please consult the factory for other center frequencies or bandwidths.

## Features

- 550 MHz center frequency
- Sharp transition to 50 dB
- 50  $\Omega$
- SMA connectors

## Typical Performance

**Overall Response**  
(10 dB/div)

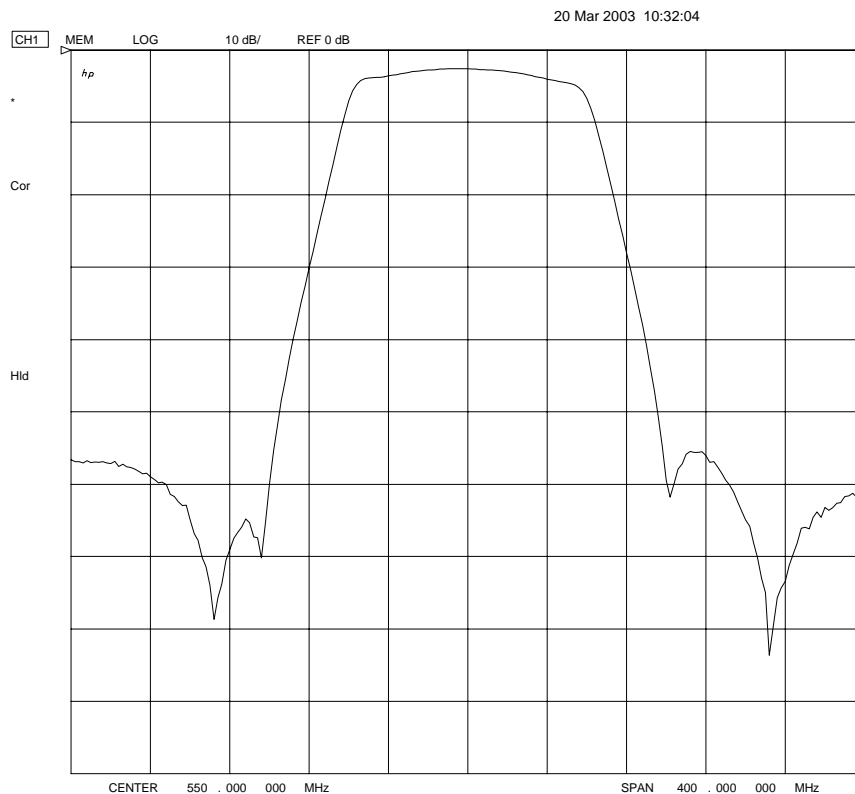

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2464

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	550 MHz
Insertion Loss	< 4 dB (2.5 dB Typical)
Attenuation at 449 MHz	> 50 dB
Attenuation at 499 MHz	< 3 dB
Attenuation at 601 MHz	< 3 dB
Attenuation at 651 MHz	> 50 dB
Source & Load	50 Ω

## Physical Dimensions

