


General Description

KR Electronics part number 3361-20-25/50+ is a 19.95 MHz Bandpass filter. The filter has a nominal 3 dB bandwidth of 23 MHz. Other center frequencies and bandwidths are available. Please consult the factory.

Features

- 19.95 MHz Bandpass Filter
- 3 dB BW: 10 MHz typical
- 40 dB BW: 41 MHz typical
- 50 Ω Source and 25 Ω Load
- Other frequencies available
- Surface Mount



Typical Performance

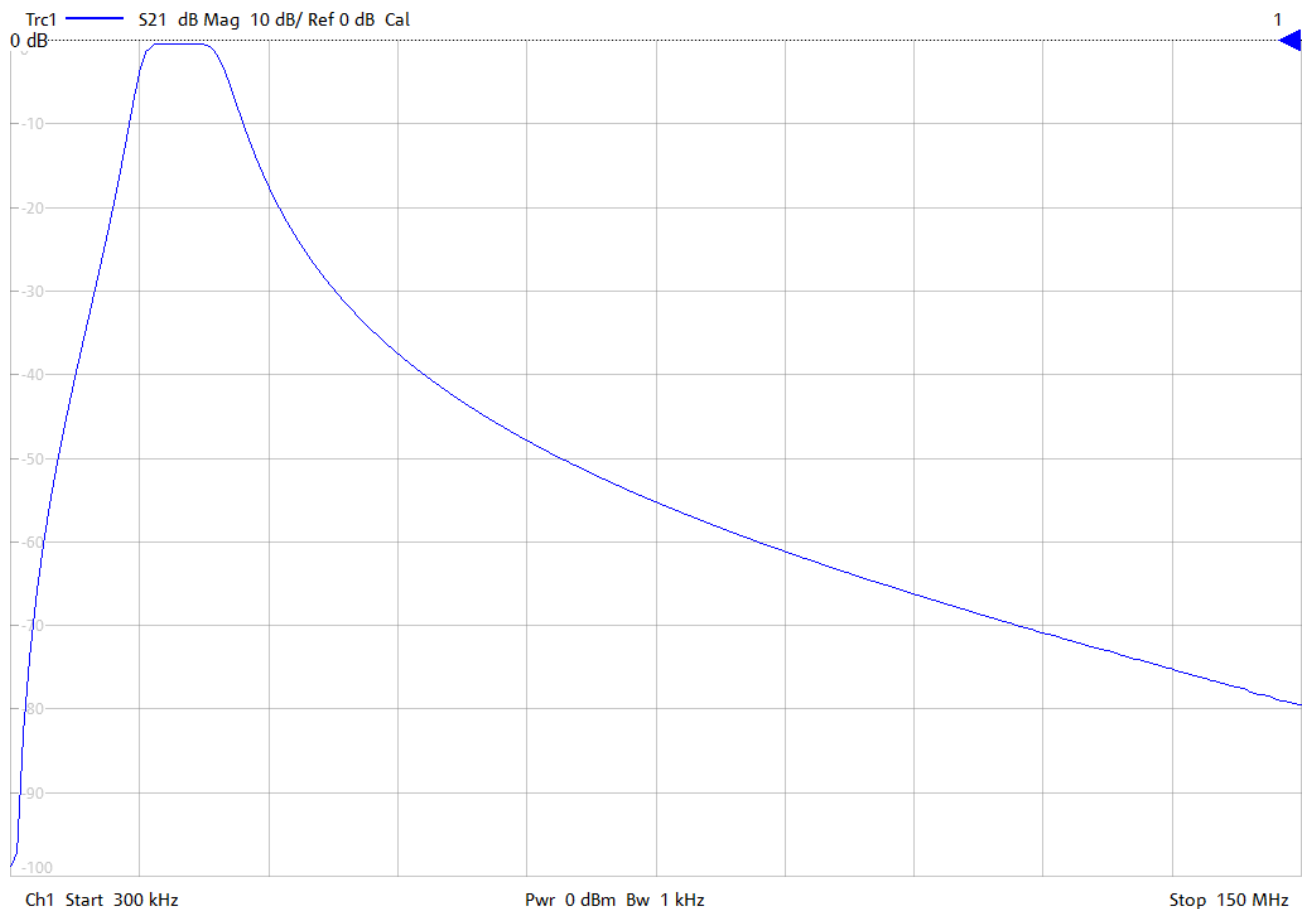

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3361-20-25/50+

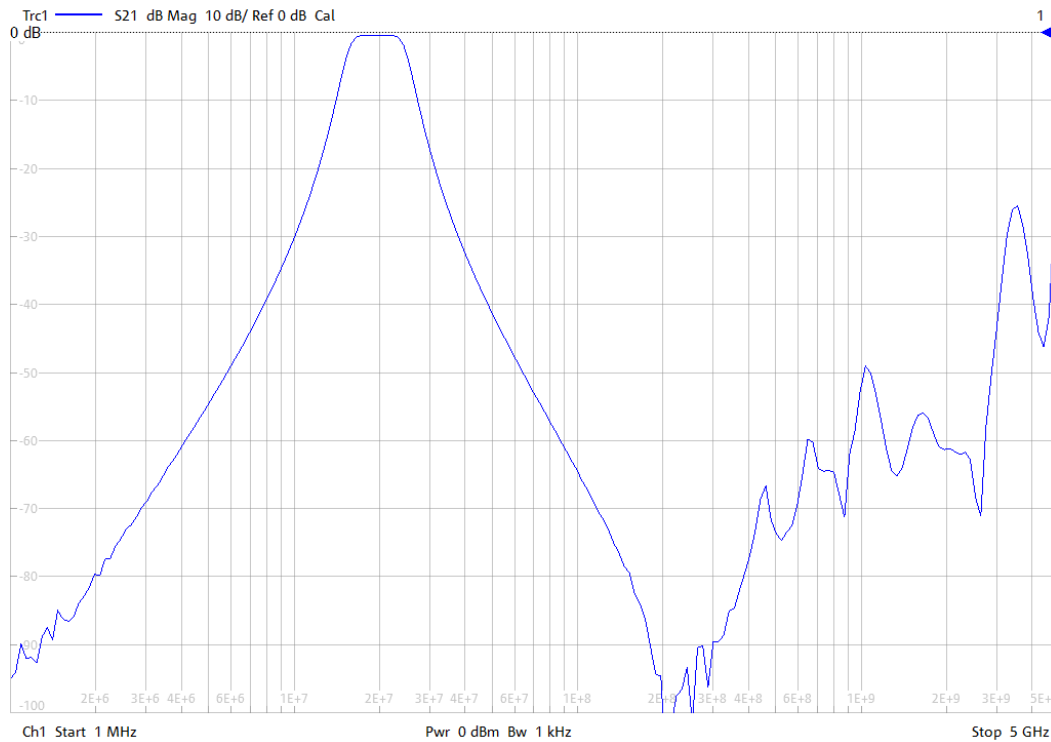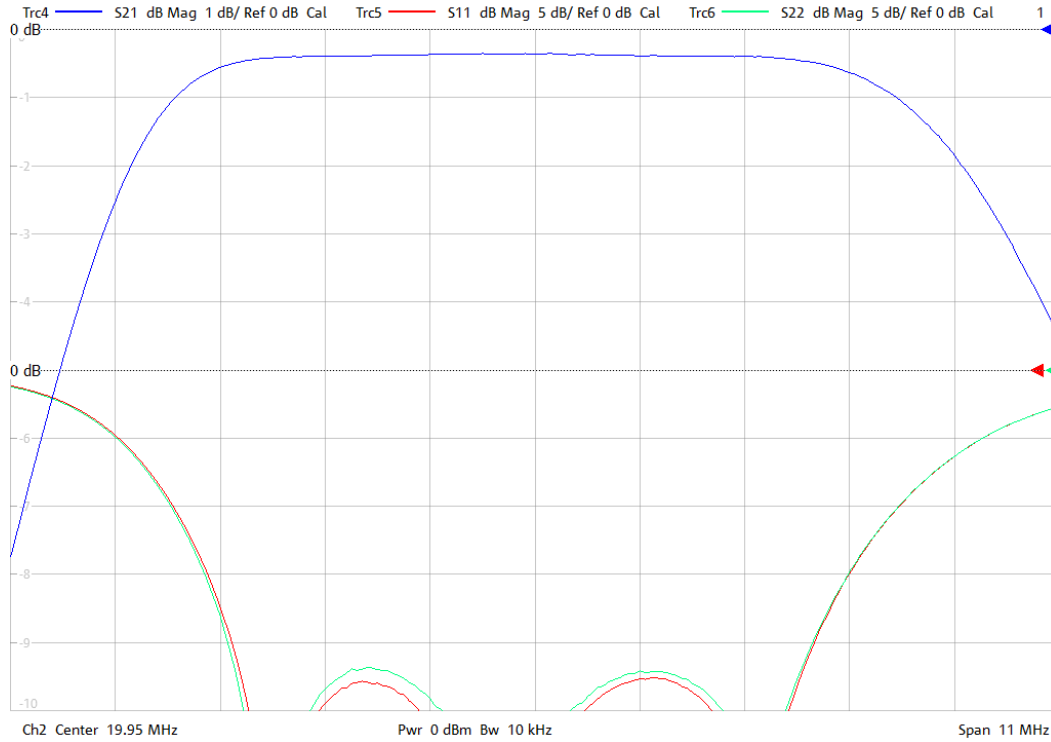

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3361-20-25/50+

Specifications

Parameter	Specification	Notes
Filter type	Bandpass	
Center Frequency	19.95 MHz	
Insertion Loss at Fc	1 dBa max	0.5 dBa typical
1 dBc Bandwidth	8 MHz typical	
3 dBc Bandwidth	10 MHz typical	
40 dBc Bandwidth	41 MHz typical	
60 dBc Bandwidth	84 MHz typical	
Source Impedance	50 Ω	
Load Impedance	25 Ω	

Physical Dimensions

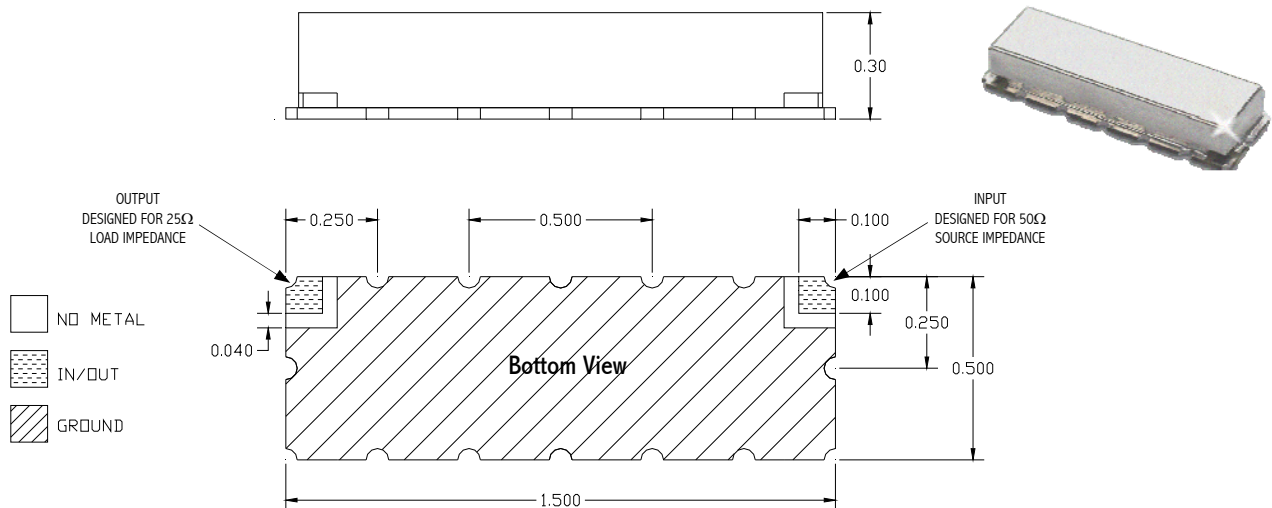

Notes:

1. Surface mount package — Metal cover open frame
2. Dimensions in inches
3. Maximum reflow temperature is 230° C for 10 sec maximum.
4. If boards are cleaned after installation, units must be completely dried.

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982