


General Description

KR Electronics part number 3406-SMA-MF is a 200 MHz Bandpass Filter. The filter has a typical 1 dB bandwidth of 25 MHz. Other frequencies are available. Please consult the factory.

Features

- Bandpass Filter
- 200 MHz Center Frequency
- 1 dB Bandwidth: 25 MHz typical
- 30 dB Bandwidth: 50 MHz max
- Selective Elliptic Typed Design
- 50 Ω Source and Load
- SMA Connectors



Typical Performance

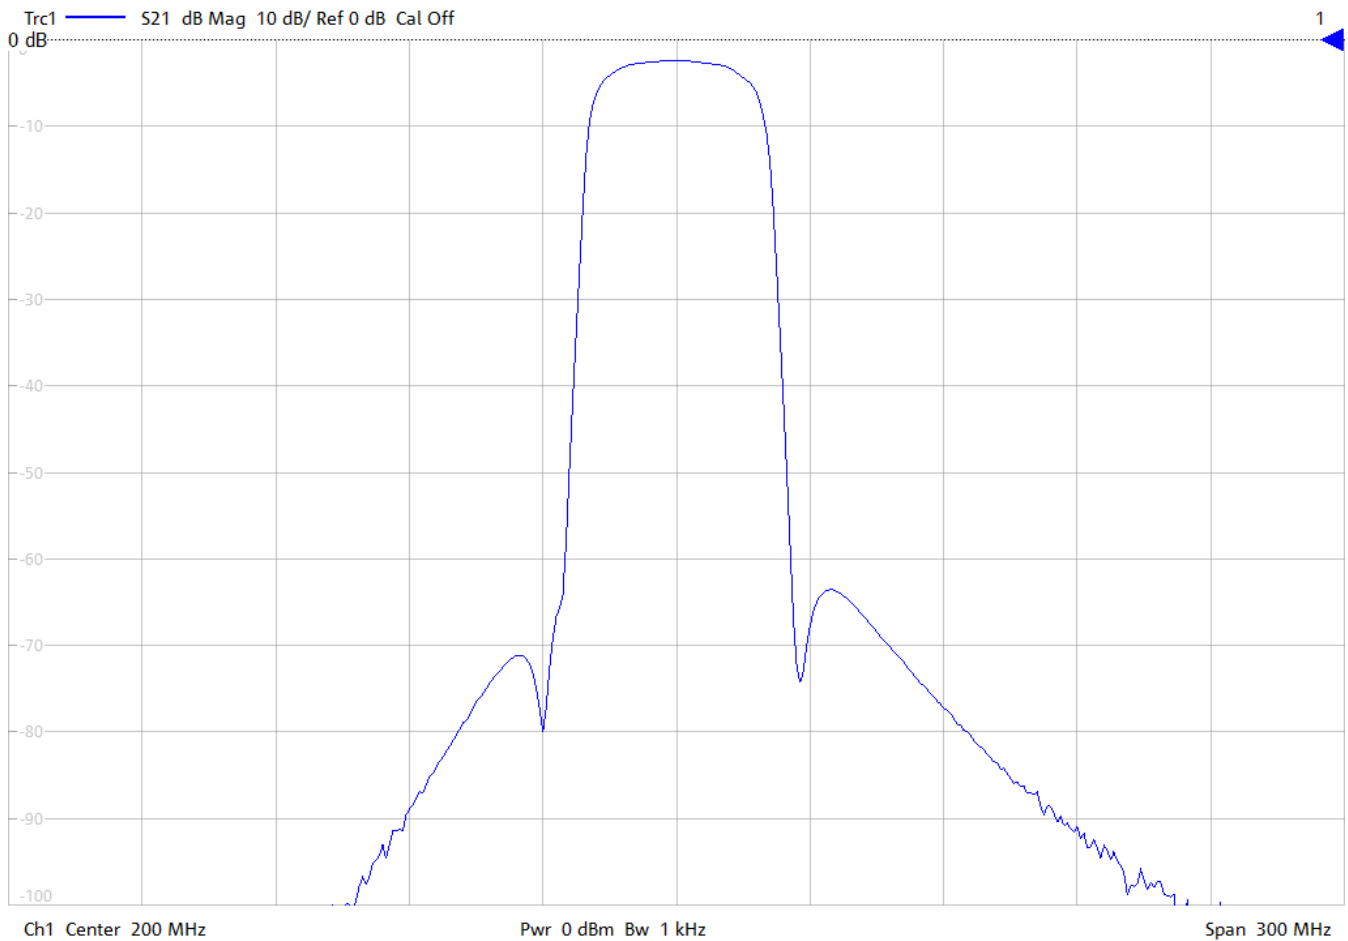

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3406-SMA-MF

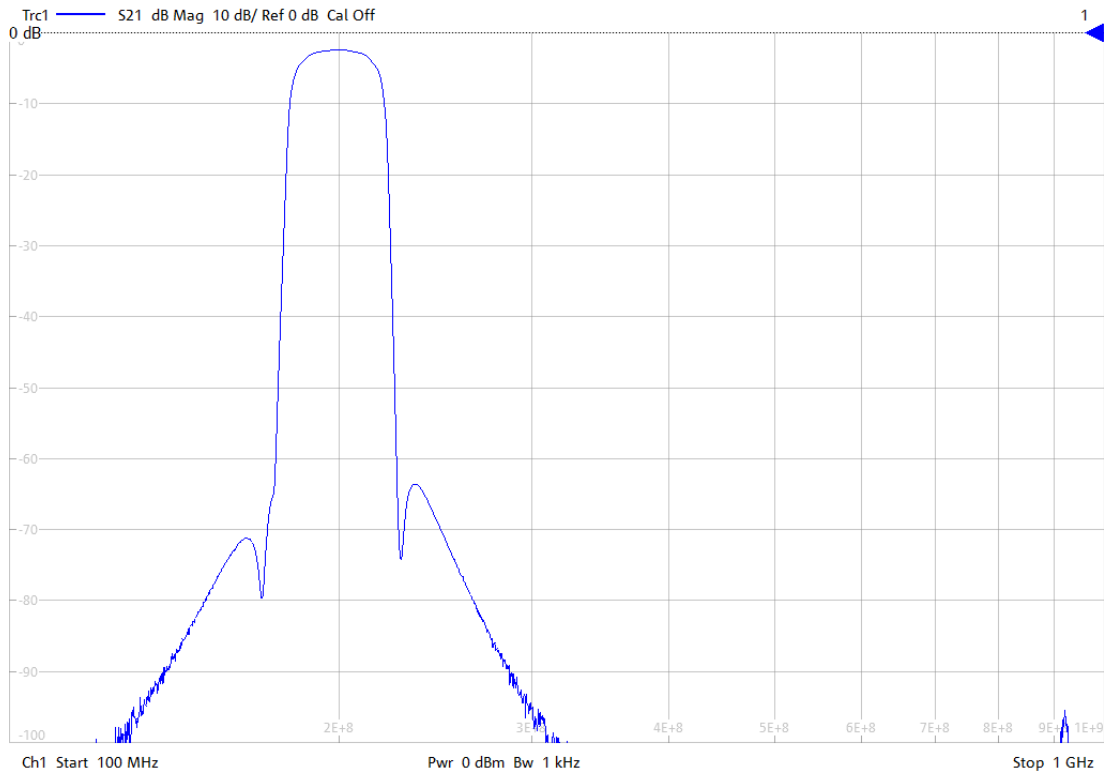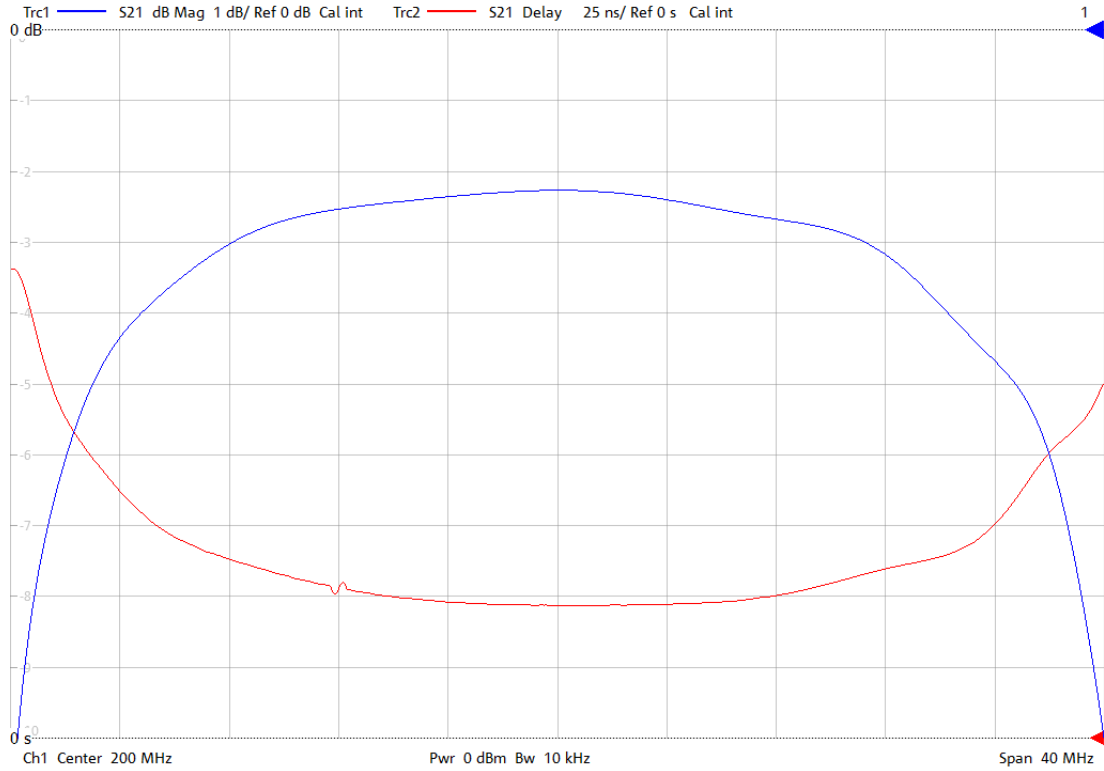

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3406-SMA-MF

Specifications

Parameter	Specification	
Filter type	Bandpass	
Center Frequency	200 MHz	
Insertion Loss at 200 MHz	3.5 dBa max	2.3 dBa typical
1 dBc Bandwidth	12 MHz min	25 MHz typical
3 dBc Bandwidth	34.4 MHz typical	
30 dBc Bandwidth	50 MHz max	45.5 MHz typical
50 dBc Bandwidth	49.5 MHz typical	
Source and Load	50 Ω	

Physical Dimensions

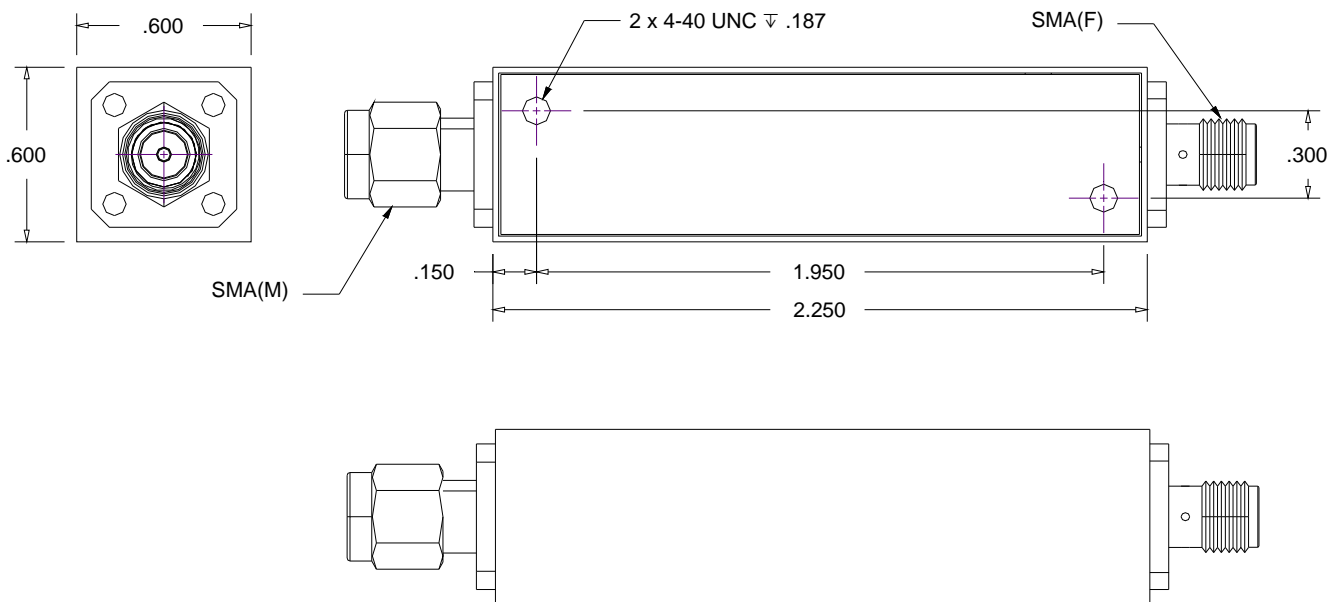

Notes:

1. Dimensions in inches

KR Electronics, Inc.
 91 Avenel Street
 Avenel, NJ 07001

Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982