

KR Electronics, Inc.

General Description

KR Electronics part number 3407+ is a 250 MHz Bandpass filter. The filter has a typical 1 dB bandwidth of 60 MHz. Other center frequencies and bandwidths are available. Please consult the factory.

Features

- 250 MHz Bandpass Filter
- Selective Elliptic Type Filter
- 1 dB Bandwidth: 60 MHz typical
- 40 dB Bandwidth: 100 MHz typical
- 50 Ω Source and Load
- Surface Mount
- Available with SMA Connectors



Typical Performance



KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3407+

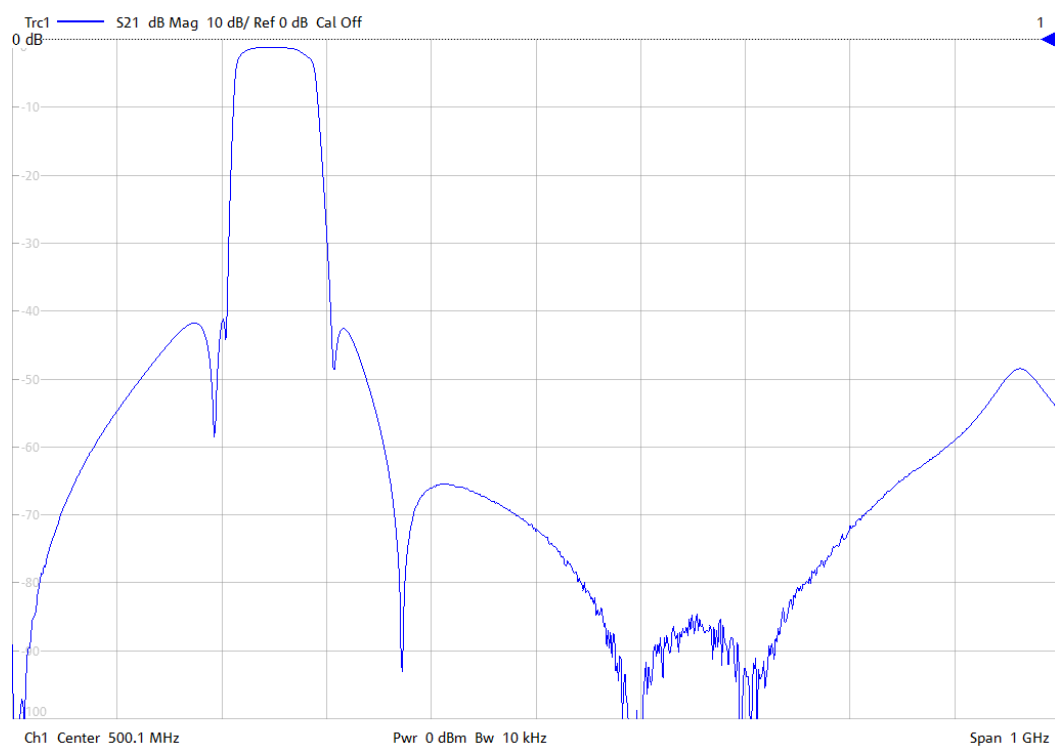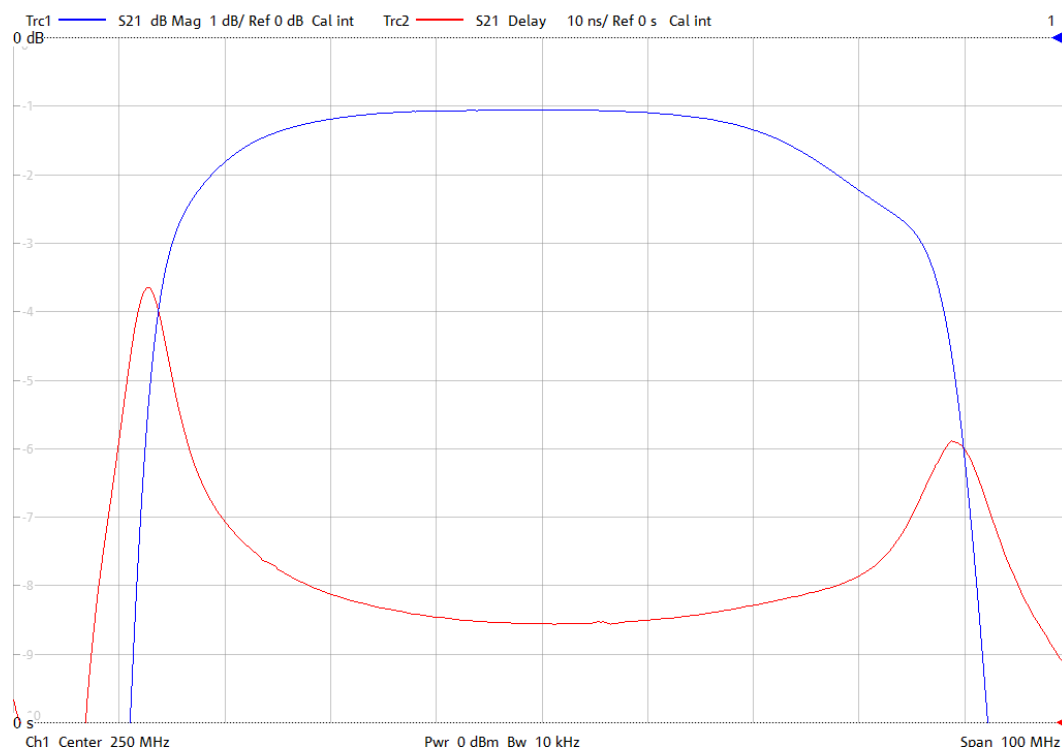

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001



Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3407+

Specifications

Parameter	Specification	Notes
Filter type	Bandpass	
Center Frequency	250 MHz	
Insertion Loss at Fc	2 dBa max	1 dBa typical
1 dBc Bandwidth	60 MHz typical	
3 dBc Bandwidth	74 MHz typical	
20 dBc Bandwidth	89 MHz typical	
40 dBc Bandwidth	95 MHz typical	
60 dBc Bandwidth	100 MHz typical	
Source and Load	50 Ω	

Physical Dimensions

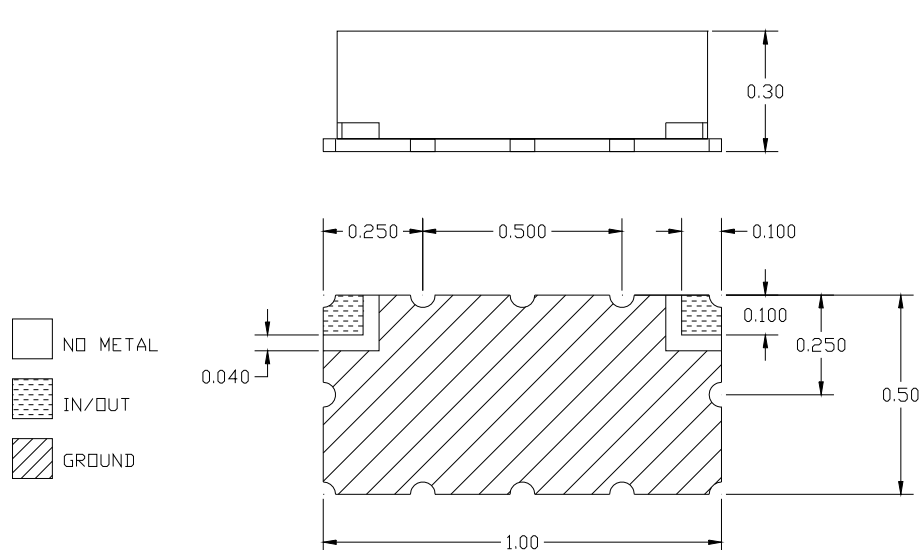

Notes:

1. Surface mount package
2. Dimensions in inches
3. Max reflow temperature 230° C for 10 sec
4. If boards are cleaned after installation units must be completely dried

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982