

KR Electronics

General Description


KR 2853 is a 10.75 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 7.5 MHz. Other passband frequencies are available. Please consult the factory.

Features


- 10.75 MHz Center Frequency
- 7.5 MHz Bandwidth
- SMA Connectors
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay (1 dB/div and 100 nsec/div)

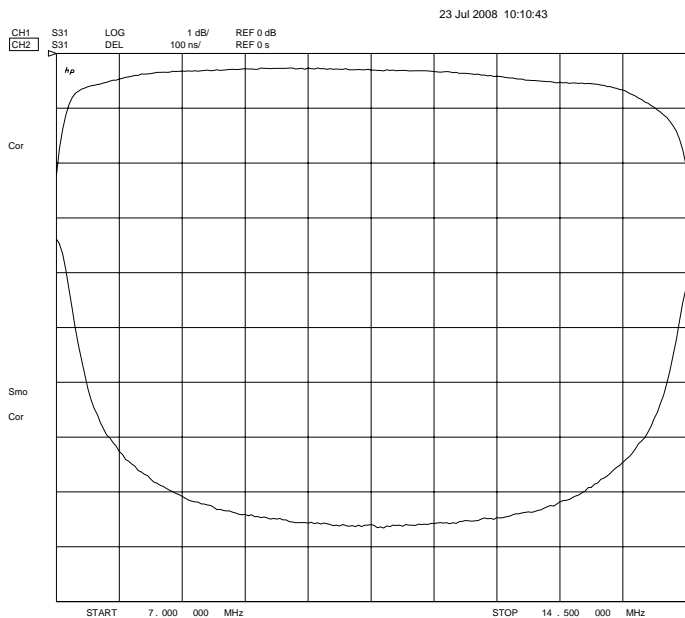

Overall Response (10 dB/div)

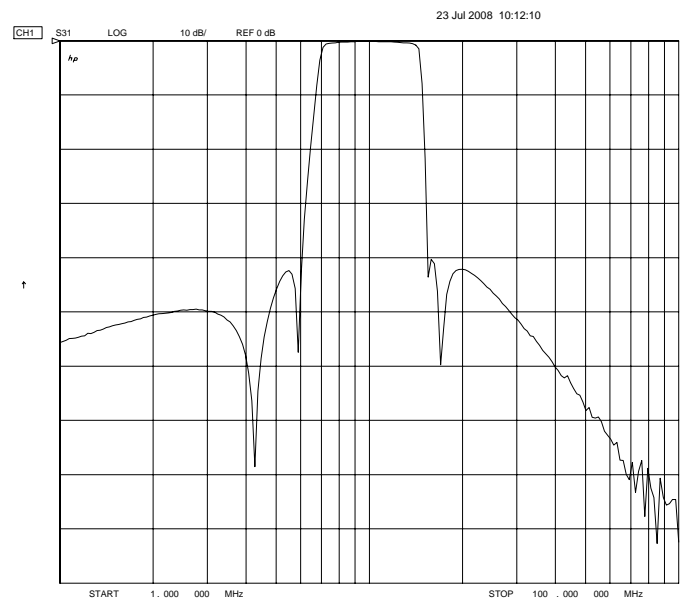

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001



Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2853

Specifications

Parameter	Specification	
Filter type	Bandpass	
Center Frequency	10.75 MHz	
Insertion Loss	< 1.5 dB	0.3 dB typical
Attenuation at 7 MHz	< 3 dB	2 dB typical
Attenuation at 14.5 MHz	< 3 dB	2 dB typical
Attenuation at 6 MHz	> 35 dB	40 dB typical
Attenuation at 15.5 MHz	> 35 dB	40 dB typical
Source and Load	50 Ω	

Physical Dimensions

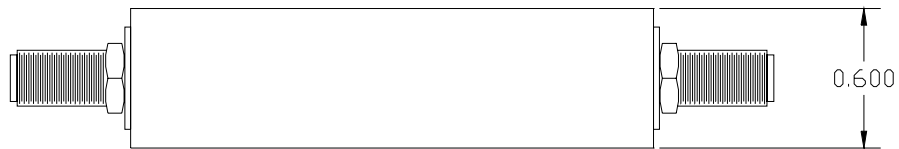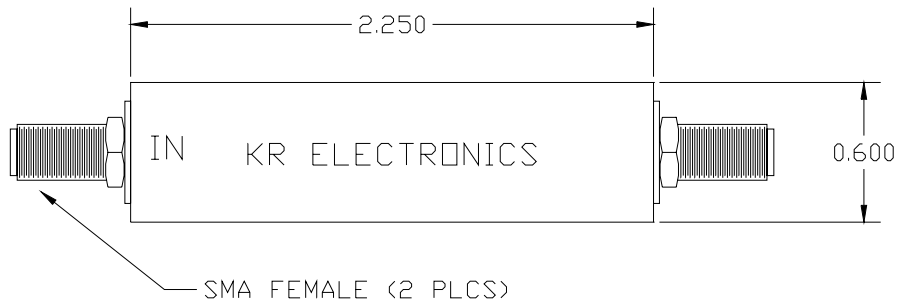

Dimensions in inches
Metal Case