

# KR Electronics

## General Description


KR 2855 is a 550 MHz to 900 MHz bandpass filter. Other pass-band frequencies are available. Please consult the factory.

### Features


- 725 MHz Center Frequency
- 550 MHz to 900 MHz Passband
- Sharp Transition to Stopband
- Surface Mount
- 50  $\Omega$  Source and Load

## Typical Performance

**Passband Amplitude & Group Delay**  
(1 dB/div and 5 nsec/div)

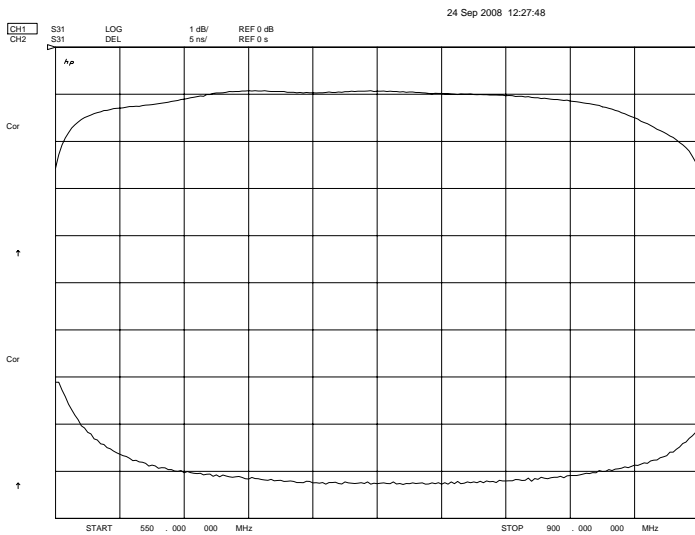

**Overall Response**  
(10 dB/div)

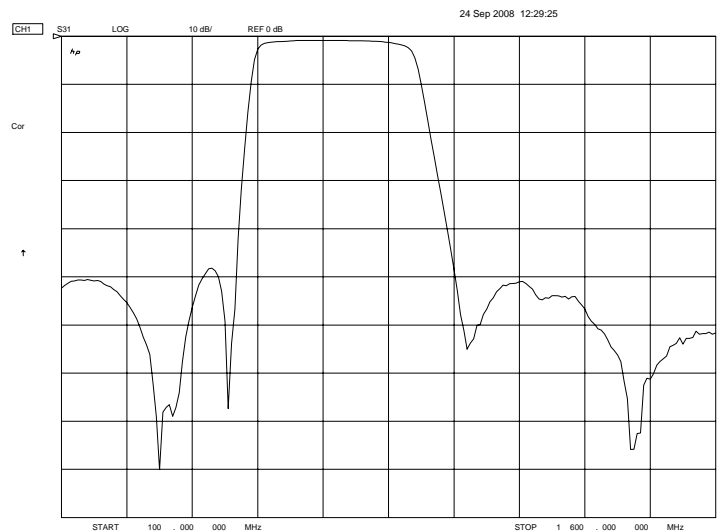

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2855

## Specifications

Parameter	Specification
Filter type	Bandpass
Insertion Loss	< 2 dB ( 1 dB typical )
Attenuation at 550 MHz	< 3 dB
Attenuation at 900 MHz	< 3 dB
Attenuation at 500 MHz	> 40 dB
Attenuation at 1000 MHz	> 40 dB
Source and Load	50 Ω

## Physical Dimensions

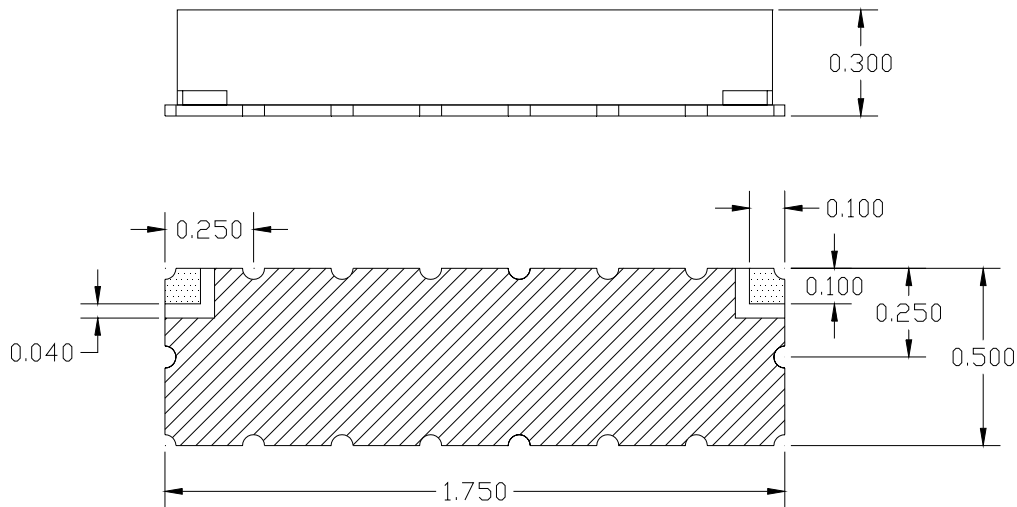

**Notes:**

1. Surface mount package — Metal cover
2. Dimensions in inches
3. Maximum reflow temperature is 209° C for 15 sec maximum.
4. If boards are cleaned after installation, dry units completely.