

KR Electronics

General Description


KR 2886 is a 110 MHz lowpass filter. The filter has a minimum 1 dB bandwidth of 110 MHz. Other passband frequencies are available. Please consult the factory.

Features


- 110 MHz Cutoff Frequency
- 50 Ω Source and Load
- SMA Connectors
- Also available in surface mount

Typical Performance

Passband Amplitude & Group Delay (1 dB/div and 5 nsec/div)

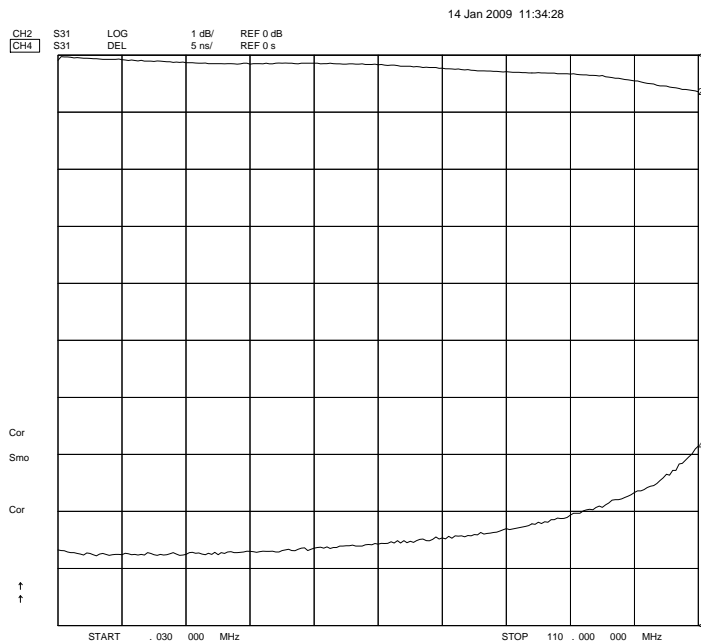

Overall Response (10 dB/div)

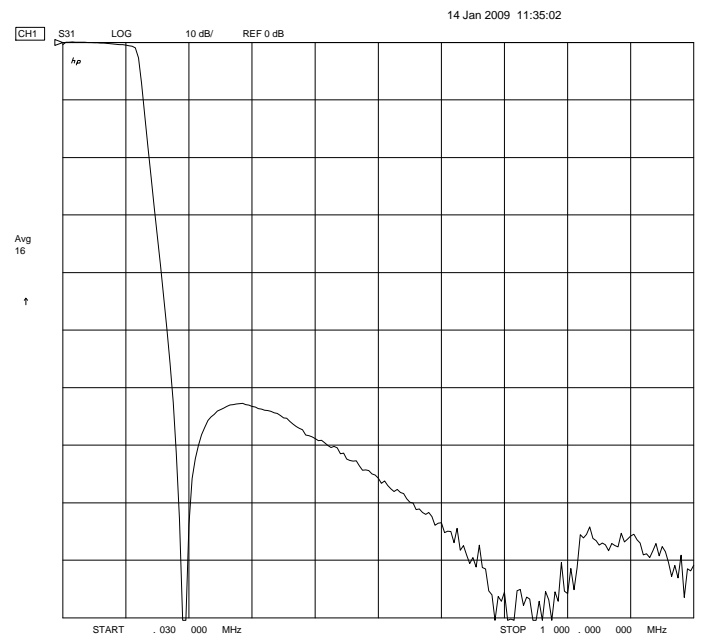

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001



Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2886

Specifications

Parameter	Specification
Filter type	Lowpass
Attenuation at 110 MHz	< 1 dB
Attenuation at 180 MHz	> 40 dB (> 60 dB typical)
Source and Load	50 Ω

Physical Dimensions

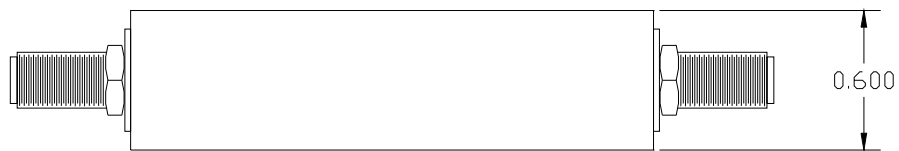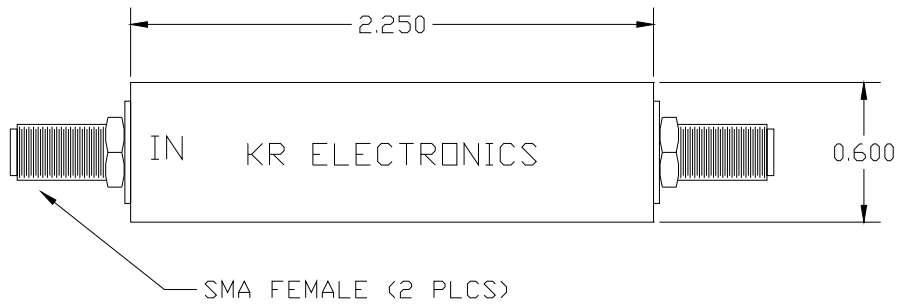

Dimensions in inches
Metal Case
Also available in surface mount