

KR 2479 Lowpass Filter

General Description


KR 2479 is a very low cost small SIP lowpass filters. Other cutoff frequencies can be specified.

Features


- 30 MHz passband
- Very Low Cost
- Small SIP Package

Typical Performance

Passband Response & Group Delay
(0.5 dB/div & 10 nsec/div)

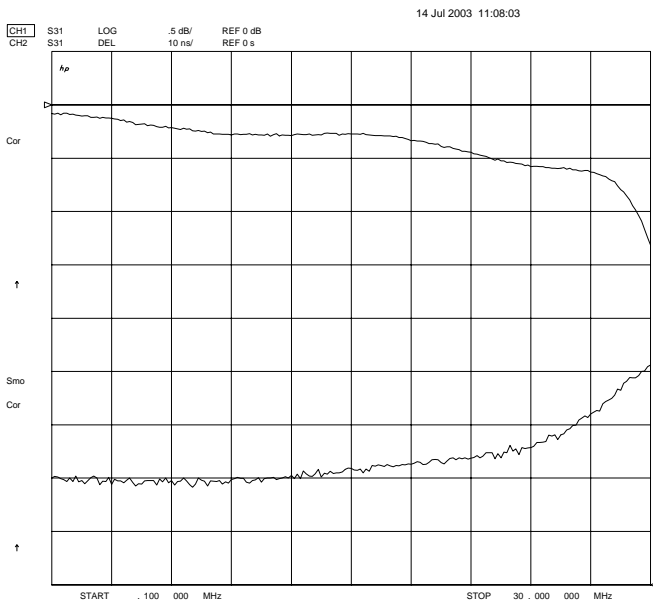

Overall Response
(10 dB/div)

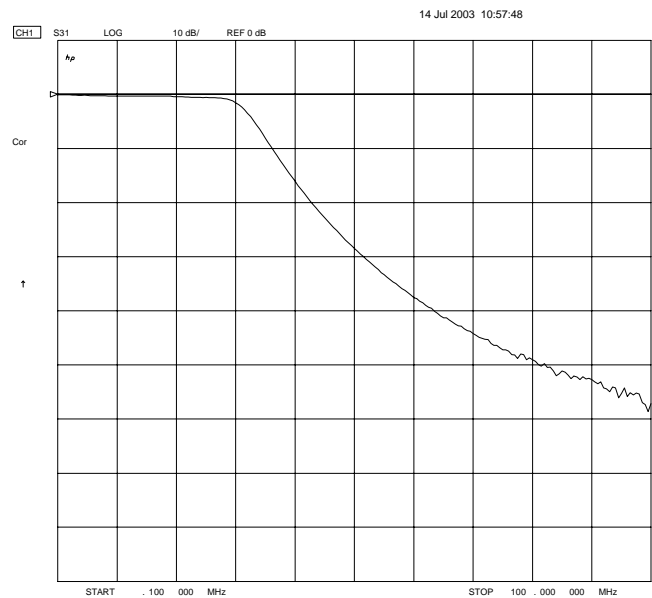

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2479 Lowpass Filter

Specifications

Parameter	Specification	
Filter type	Lowpass	
Insertion Loss	< 0.5 dB	
< 1 dB Attenuation (fc)	30 MHz	Consult Factory for other
> 12 dB Attenuation	40 MHz	
Source and Load	75 Ω	Consult Factory for other

Physical Dimensions

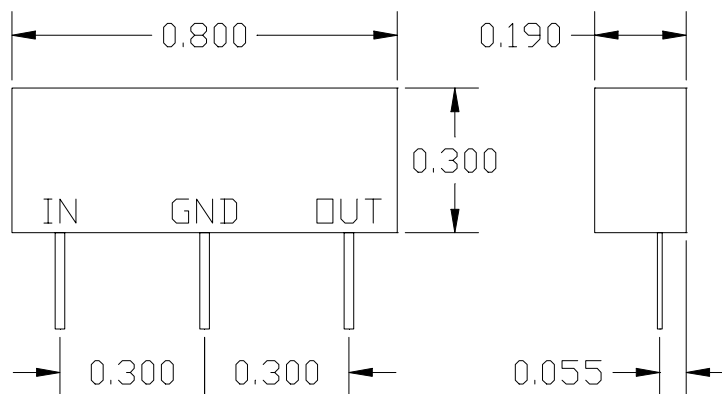

Dimensions in inches
 Pins 0.010 x 0.020
 Tolerance ± .010