

KR Electronics

General Description


KR 2740 is a 44 MHz lowpass filter. The passband is flat within 0.5 dB to 44 MHz. Stopband attenuation is 60 dB by 60 MHz. Other frequencies are available. Please consult the factory.

Features


- 44 MHz Lowpass
- 60 dB Stopband by 60 MHz
- Surface Mount
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay
(0.5 dB/div & 10 nsec/div)

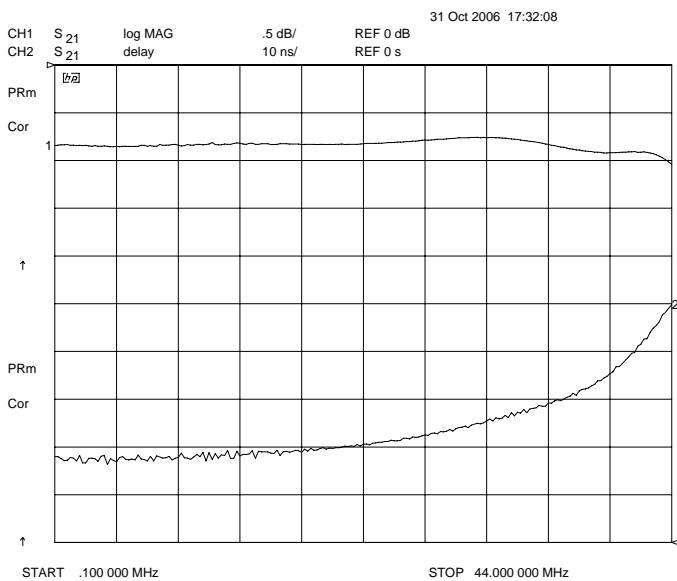

Overall Response
(10 dB/div)

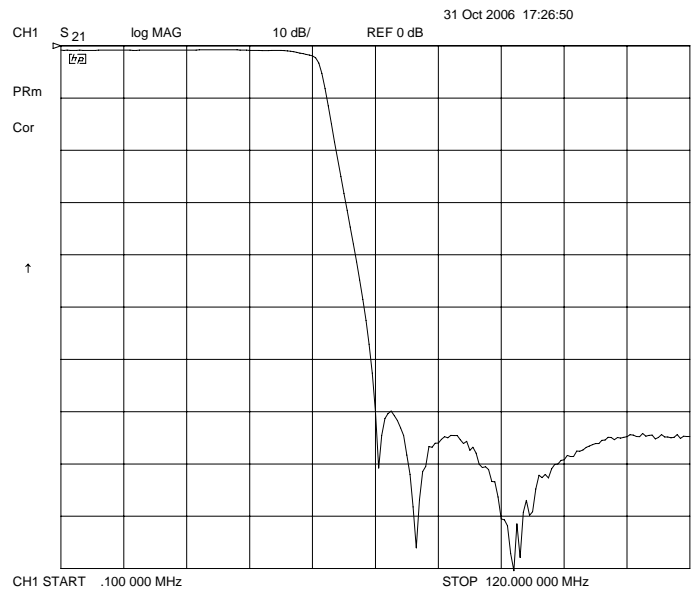

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2740 Lowpass

Specifications

Parameter	Specification	Typical
Filter type	Lowpass	
End of Passband (0.5 dB)	44 MHz	
Insertion Loss	< 1.5 dB	1 dB
Start of Stopband (60 dB)	60 MHz	
Source and Load	50 Ω	

Physical Dimensions

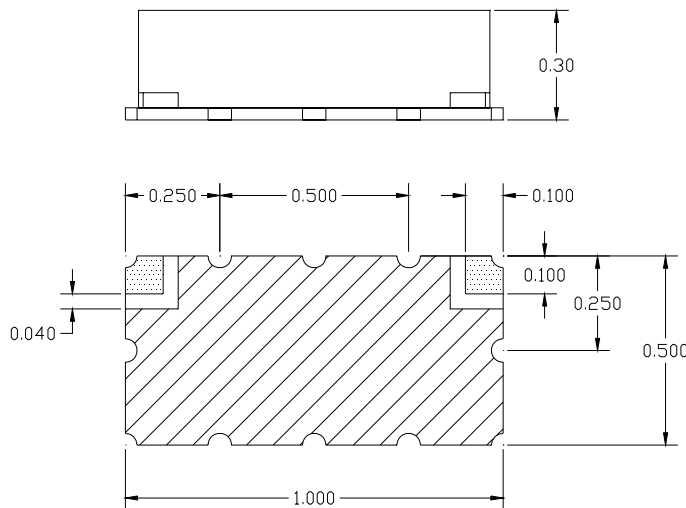

Notes:

1. Dimensions in inches
2. Maximum reflow temperature is 209°C for 10 seconds max