


Bandpass Filter

KR 1905A-4


Passband Amplitude

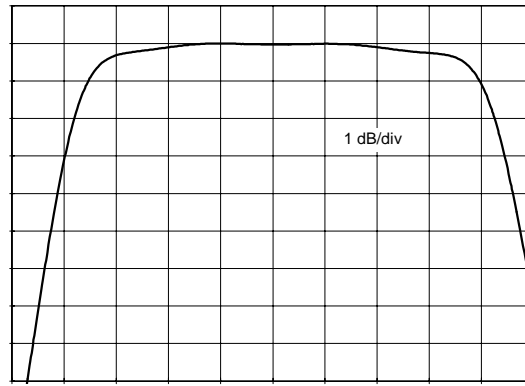

34.5 KHz

39.5 KHz

Overall Amplitude

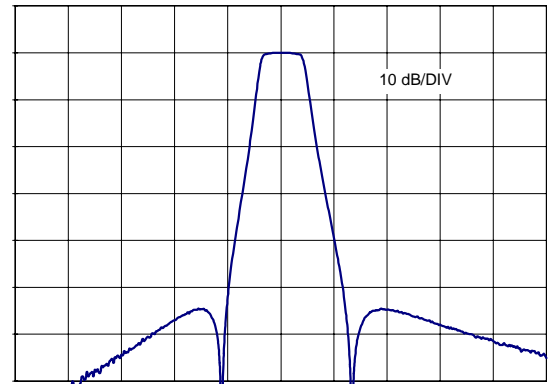


12 KHz

62 KHz

Specifications

KR Part Number	1905A-4
Filter Type	Bandpass
Insertion Loss	< 6.6 dB
Lower / Upper Passband Frequencies	35.424 KHz / 38.656 KHz
Passband Loss	< 1 dB
Lower / Upper Stopband Frequencies	31.04 KHz / 43.04 KHz
Stopband Attenuation	> 40 dB
Source Impedance	100 Ω
Load Impedance	1000 Ω

Outline Drawing

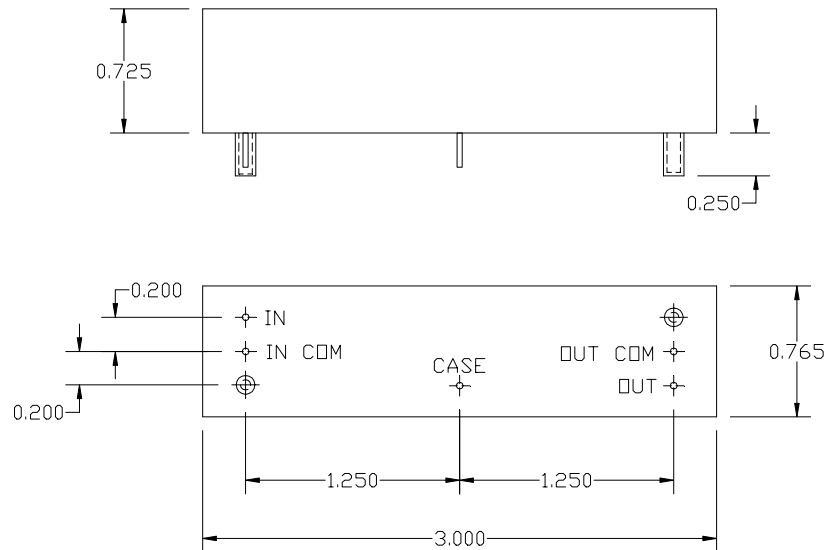

Terminals 0.03" diameter
Metal Case
Studs 4-40 UNC-2A (2 Plcs)

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900