


Bandpass Filter

KR 1905A-6


Passband Amplitude

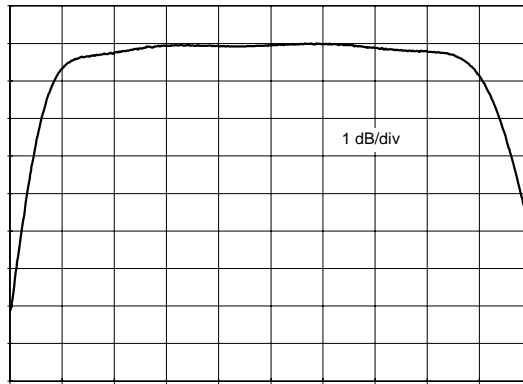

6.84 KHz

11.34 KHz

Overall Amplitude

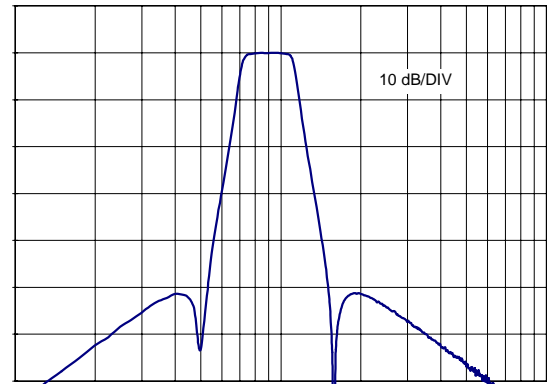


1 KHz

100 KHz

Specifications

KR Part Number	1905A-6
Filter Type	Bandpass
Insertion Loss	< 6.6 dB
Lower / Upper Passband Frequencies	7.474 KHz / 10.706 KHz
Passband Loss	< 1 dB
Lower / Upper Stopband Frequencies	3.09 KHz / 15.09 KHz
Stopband Attenuation	> 40 dB
Source Impedance	100 Ω
Load Impedance	1000 Ω

Outline Drawing

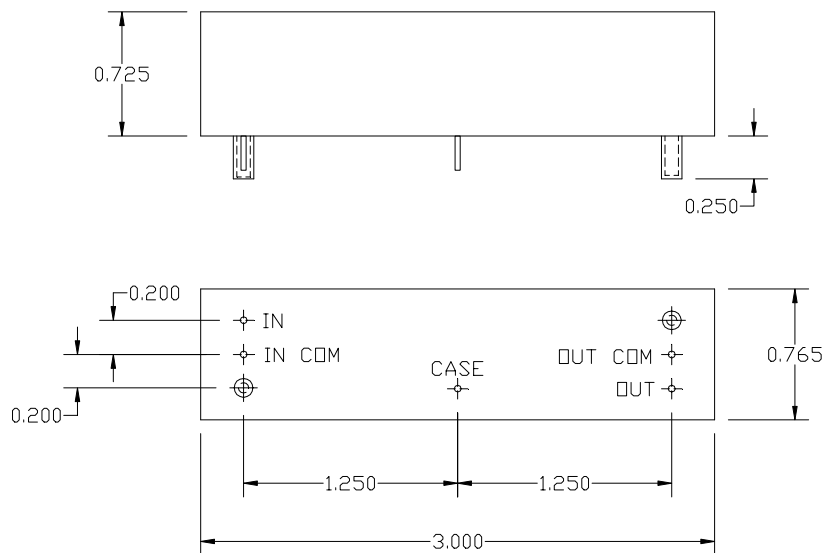

Terminals 0.03" diameter
Metal Case
Studs 4-40 UNC-2A (2 Plcs)

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900