

KR 2124SMD Video Filter

General Description


KR 2124SMD is a 5.5 MHz lowpass filter. The filter is group delay equalized and amplitude equalized. Please consult the factory for other passband or sampling frequencies.

Features


- 5.5 MHz passband
- Group delay equalized
- 75 Ω
- Surface mount

Typical Performance

Passband Amplitude & Group Delay
(0.1 dB/div & 10 nsec/div)

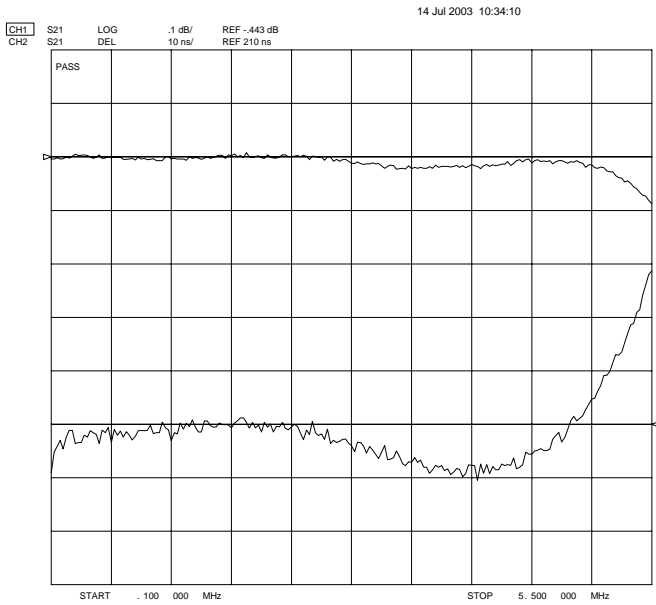

Overall Response
(10 dB/div)

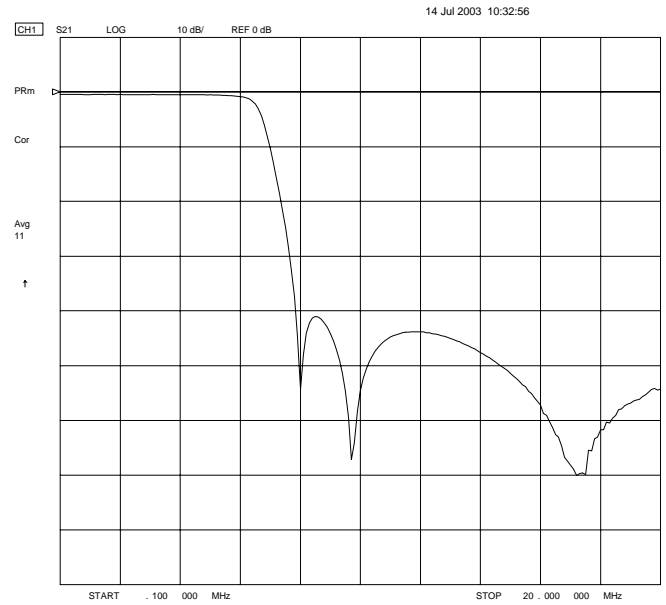

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2124SMD

Specifications

Parameter	Specification
Filter type	Lowpass
End of Passband	5.5 MHz
Passband Ripple to 5.5 MHz	< 0.2 dB
Insertion Loss (at 100 KHz)	< 1 dB
Group Delay Ripple to 5 MHz	< 20 nsec (10 typ)
Source & Load	75 Ω

Physical Dimensions

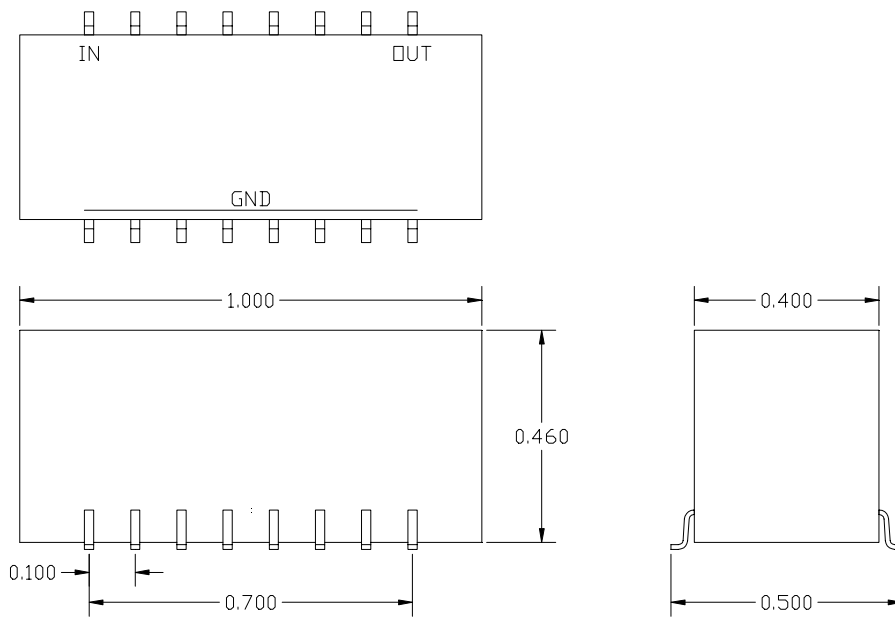

Dimensions in inches

KR Electronics, Inc.
 91 Avenel Street
 Avenel, NJ 07001

Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982