

# KR 2157-88-5-50 Bandpass Filter

## General Description


KR 2157-88-5-50 is a 88 MHz bandpass filter. The filter has a 5% min 3 dB bandwidth and is designed for 50  $\Omega$  source and load impedance. Other passband frequencies, bandwidths and impedances are available. Please consult the factory.

## Features


- 88 MHz Bandpass
- 50  $\Omega$
- DIP Package

## Typical Performance

**Passband Amplitude**  
(1 dB/div)

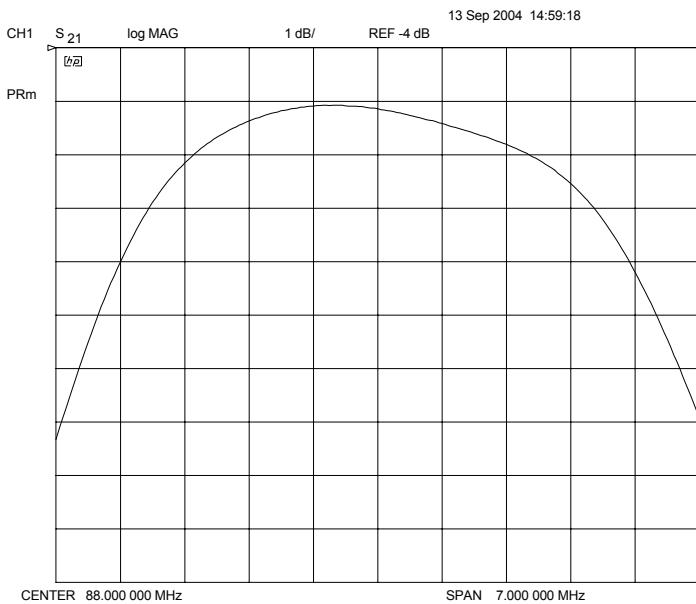

**Overall Response**  
(10 dB/div)

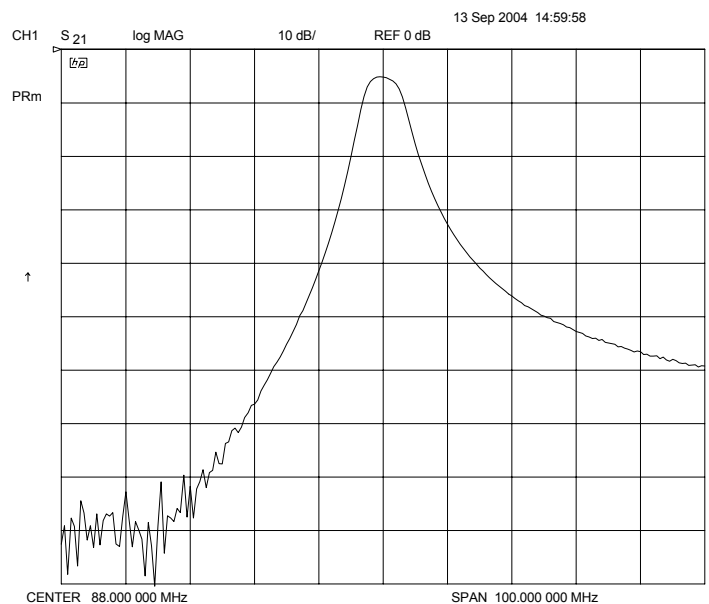

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2157-88-5-50

## Specifications

Parameter	Specification
Filter type	Bandpass
Insertion Loss	< 6 dB ( < 5 typical)
Minimum 3 dB Bandwidth	4.4 MHz
Maximum 40 dB Bandwidth	35.2 MHz
Source & Load	50 Ω

## Physical Dimensions

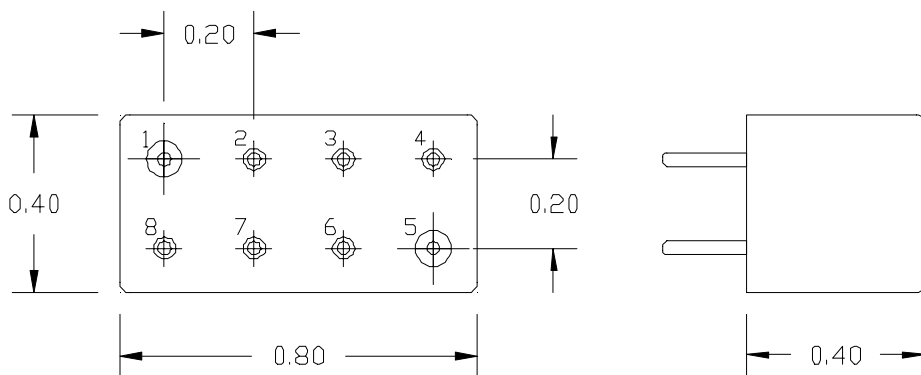

Metal Case  
 Pin 1 is Input Pin 5 is Output  
 All other Pins are Ground  
 All leads .030" diameter  
 Dimensions inches