

Bandpass Filter

KR Model 2318


Passband Amplitude

Overall Amplitude

Specifications


KR Part Number	2318
Filter Type	Bandpass
Center Frequency	6.5 KHz
Insertion Loss	< 1 dB
1.5 KHz	> 32 dB
3.0 KHz	< 1.5 dB
6.5 KHz	0 dB Ref
10.0 KHz	< 1.5 dB
20.0 KHz	> 32 dB
Source and Load Impedance	10 K Ω

Outline Drawing

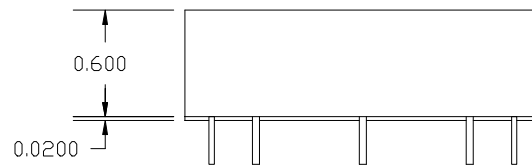

NOTES:

1. METAL CASE
2. PIN 1 - INPUT
PIN 2 AND 4 GROUND
PIN 3 OUTPUT
3. TOLERANCE UNLESS NOTED ± 0.010
4. TERM LENGTH 0.20 MIN

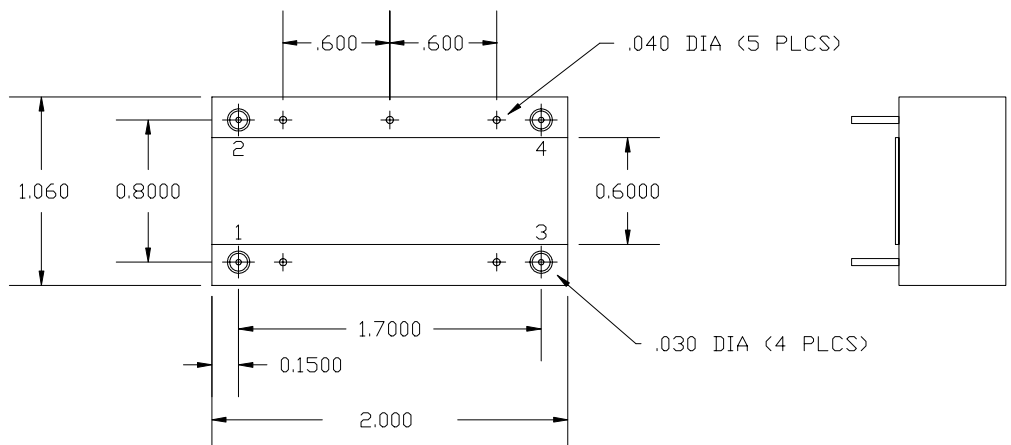

KR Electronics
www.krfilters.com
 91 Avenel Street
 Avenel, NJ 07001
 732-636-1900