


Bandpass Filter

KR Model 2339


Overall Amplitude

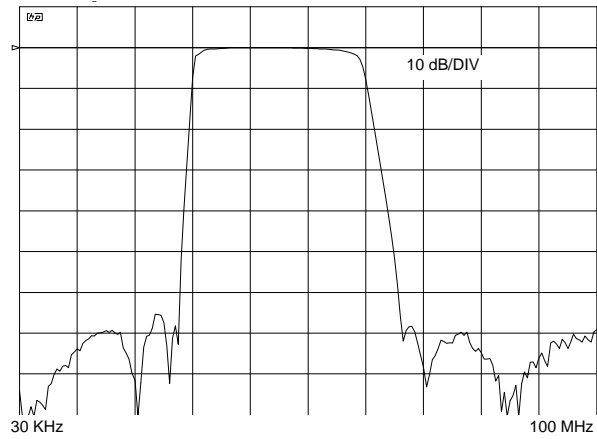

Specifications

KR Part Number	2339
Filter Type	Bandpass
Center Frequency	45 MHz
Insertion Loss	< 1.5 dB
24 MHz	> 60 dB
31 MHz	< 3 dB
40 MHz	< 1 dB
45 MHz	Ref
50 MHz	< 1 dB
59 MHz	< 3 dB
66 MHz	> 60 dB
Source and Load Impedance	50 Ω

Outline Drawing

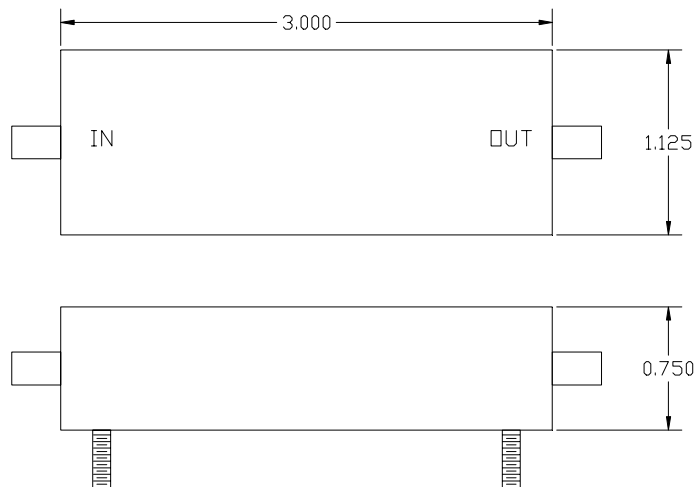

Dimensions in inches
SMA Connectors
Metal Case

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900