

# KR 2391A-8-50 Lowpass Filter

## General Description

KR 2391A-8-50 is a group delay equalized lowpass filters. The filter's flat passband response and group delay equalization make it a good choice for video applications.

## Features

- Flat passband response
- Group delay equalized

## Typical Performance

**Passband Response  $f_c=8$  MHz**  
(0.1 dB/div & 10 nsec/div) 100 KHz to 8 MHz

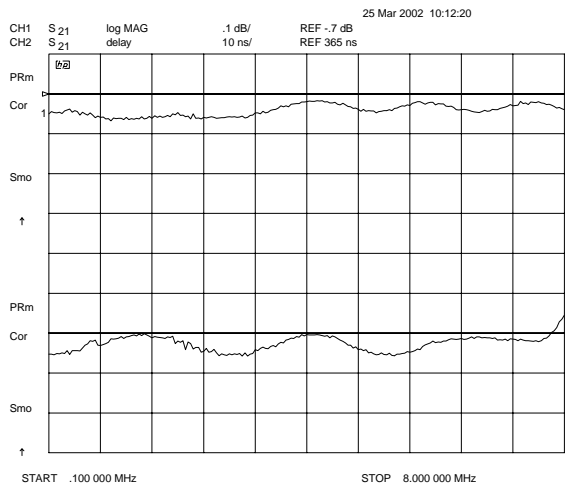


Figure 1

**Overall Response  $f_c=8$  MHz**  
(10 dB/div) 100 KHz to 25 MHz

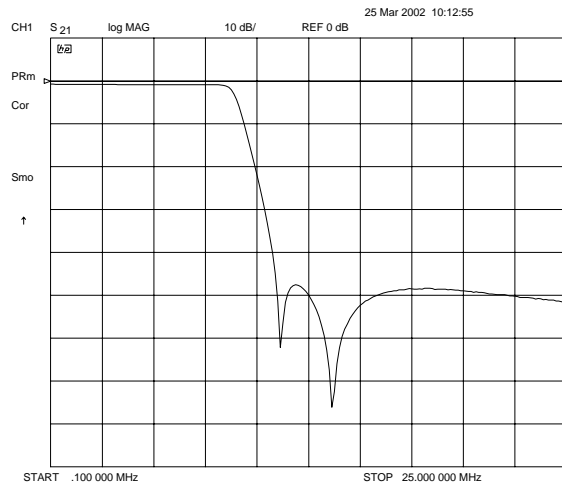


Figure 2

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

## KR Series 2391A-8-50

### Specifications

Parameter	Specification
Filter type	Lowpass
Insertion Loss	< 1 dB
End of Passband (fc)	8 MHz
Passband Ripple	< 0.25 dB
Attenuation at 1.1 x fc	< 3 dB
Attenuation at 1.38 x fc	> 45 dB
Group Delay Ripple to fc	< 10 nsec
Source and Load	50Ω

### Physical Dimensions

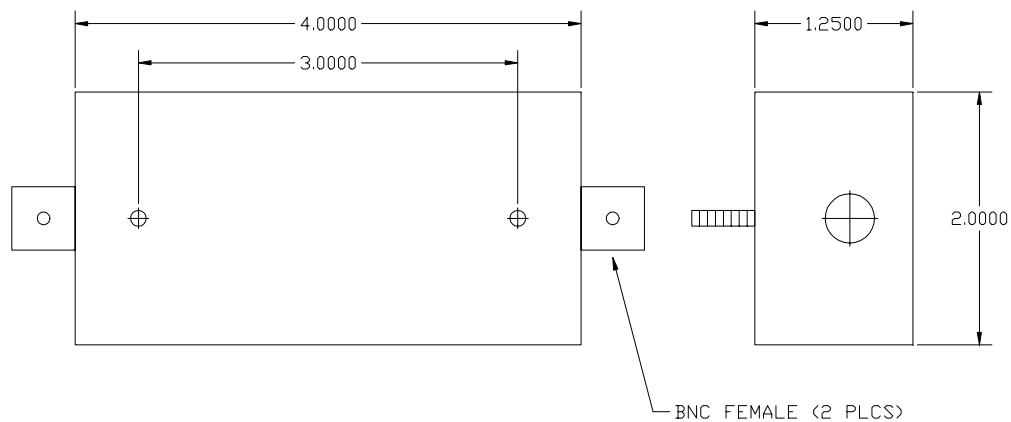

Also available in a 4 x 2 x 0.5 inch metal can  
with PCB terminals  
Other configurations available on request

All dimensions in inches

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982