

KR 2488 Bandpass Filter

General Description


KR 2488 is a 95 MHz bandpass filter. Other frequencies can be specified.

Features

- 95 MHz center frequency
- 30 MHz min 3 dB bandwidth
- SMA connectors
- 50 Ω

Typical Measured Performance

Overall Response (10 dB/div)

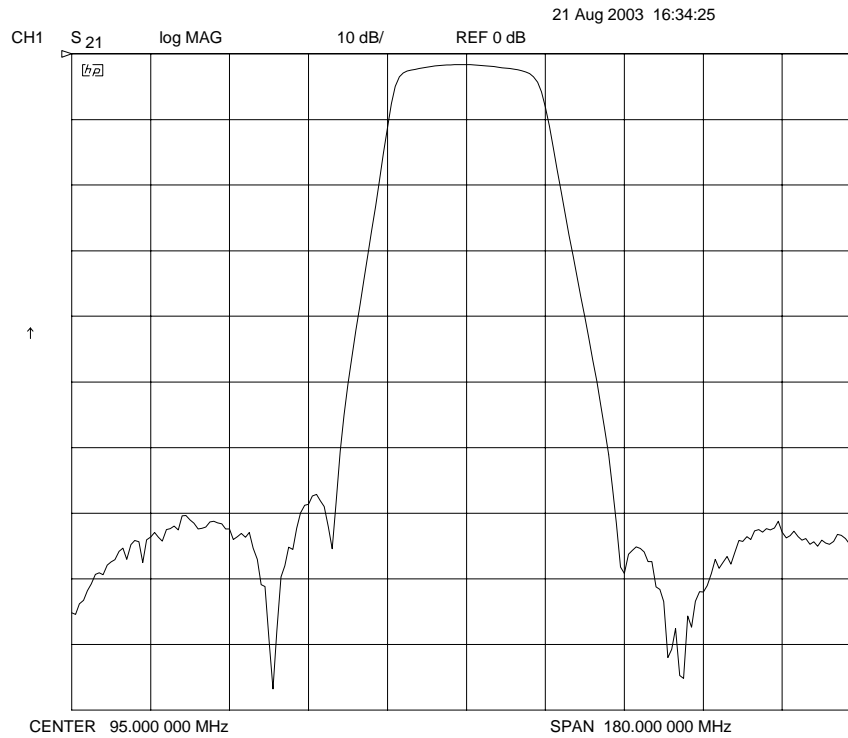

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2488 Bandpass Filter

Specifications

Parameter	Specification
Filter type	Bandpass
Insertion Loss	< 3 dB
Min 3 dB Passband	30 MHz
Attenuation at 65 MHz	> 60 dB
Attenuation at 130 MHz	> 60 dB
Source and Load	50 Ω

Physical Dimensions

