

# KR 2491 Notch Filter

## General Description


KR 2491 is a 3.75 MHz notch filter. Other frequencies can be specified.

### Features

- 3.75 MHz center frequency
- 50  $\Omega$

## Typical Measured Performance

### Overall Response (10 dB/div)

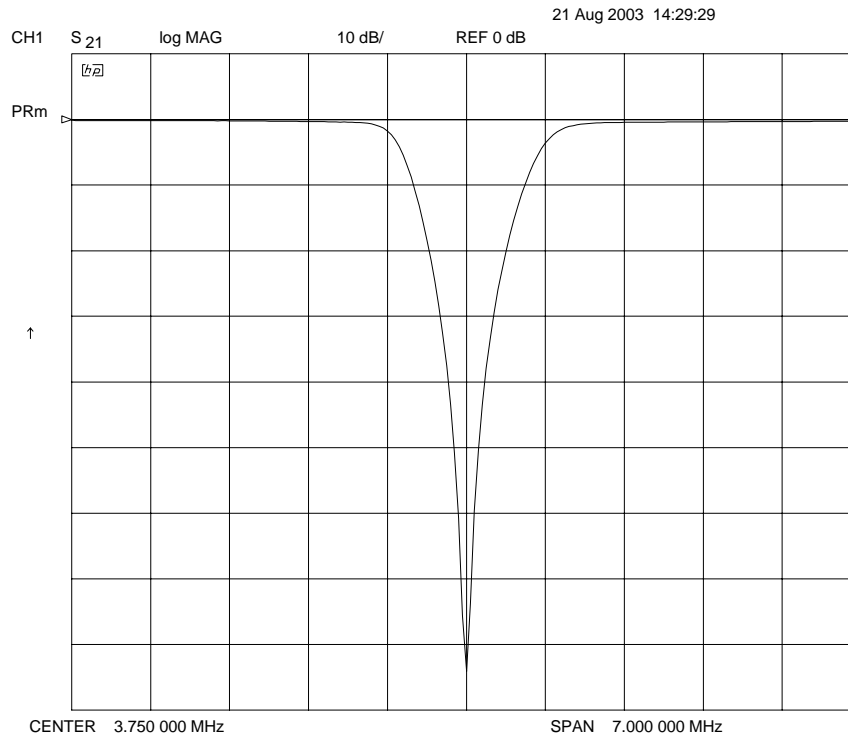

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2491 Notch Filter

## Specifications

Parameter	Specification	
Filter type	Notch	
Insertion Loss	< 0.5 dB	
Notch Frequency	3.75 MHz	Consult Factory for other
Notch Depth	> 50 dB	
3 dB Bandwidth	Approx 1.25 MHz	
Source and Load	50 Ω	Consult Factory for other

## Physical Dimensions

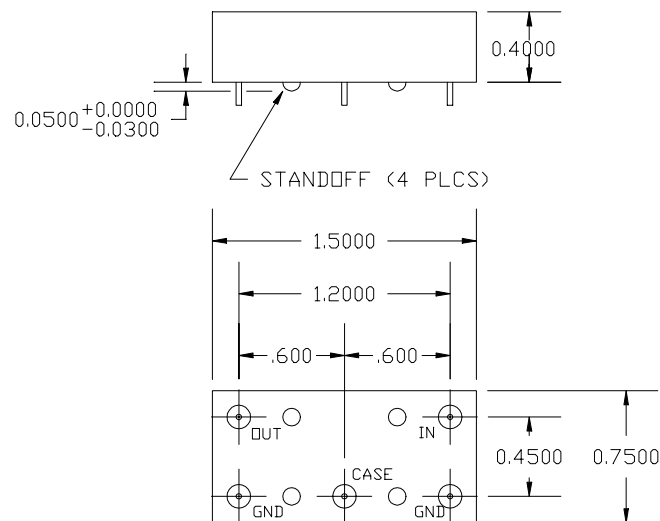

DIMENSIONS IN INCHES  
 METAL CASE  
 PIN DIAMETER 0.030" (5 PLCS)

KR Electronics, Inc.  
 91 Avenel Street  
 Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
 Email [sales@krfilters.com](mailto:sales@krfilters.com)  
 Phone (732) 636-1900  
 Fax (732) 636-1982