

KR 2492 Bandpass Filter

General Description


KR 2492 is a 15 MHz to 50 MHz bandpass filter. Other frequencies can be specified.

Features

- 15 to 50 MHz wide band bandpass
- 50 Ω

Typical Measured Performance

Overall Response & Return Loss
(10 dB/div & 5 dB/div)

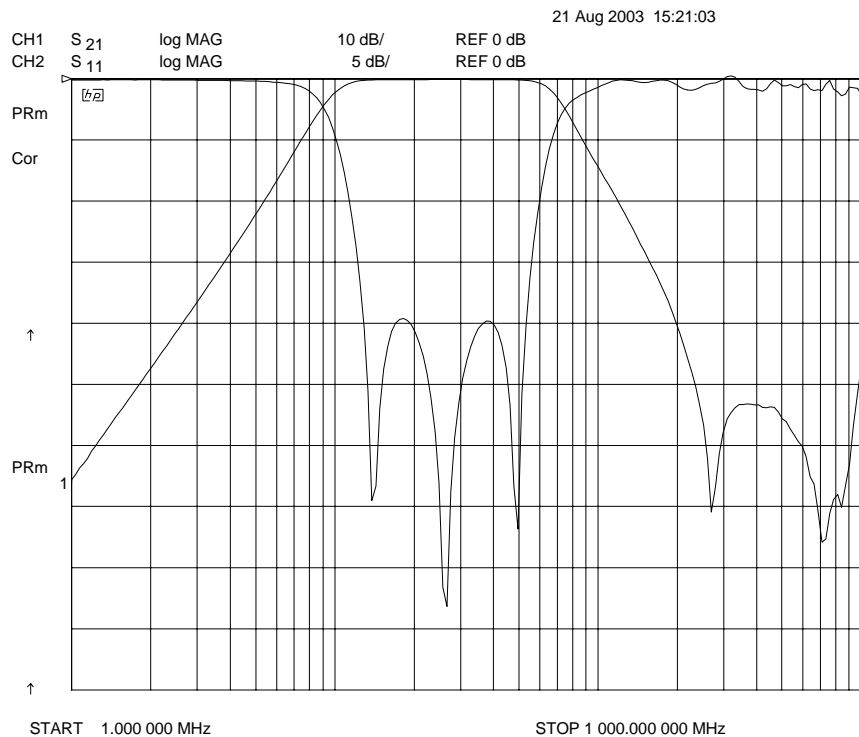

KR Electronics, Inc.
 91 Avenel Street
 Avenel, NJ 07001

Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982

KR 2492 Bandpass Filter

Specifications

Parameter	Specification	Typical
Filter type	Bandpass	
Insertion Loss	< 1 dB	
Min 1 dB Passband	15 MHz to 50 MHz	
Attenuation at 1 MHz	> 50 dB	
Attenuation at 200 MHz	> 30 dB	
Source and Load	50 Ω	

Physical Dimensions

