

KR 2553 60 MHz Bandpass Filter

General Description


KR 2553 is a 60 MHz bandpass filter. It is designed for 50 Ω source and load impedance. Other center frequencies and bandwidths are available. Please consult the factory.

Features

- 60 MHz Bandpass
- 50 Ω
- SMA Connectors

Typical Performance

Overall Response (10 dB/div)

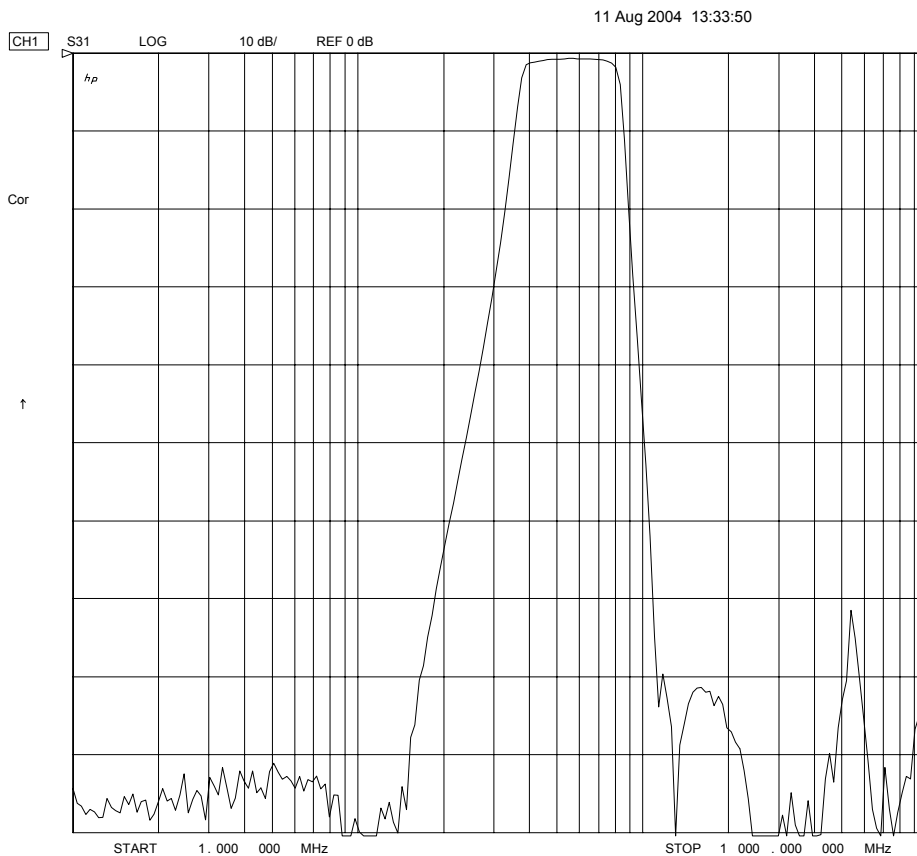

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2553

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	60 MHz
Insertion Loss	< 2 dB (< 1 dB typical)
0.4 dB Bandwidth	26 MHz minimum
Attenuation at 108 MHz to 200 MHz	> 60 dB
Source & Load	50 Ω

Physical Dimensions

