

# KR Electronics 2601 Bandpass Filter

## General Description


KR 2601 is a 6 MHz bandpass filters. Other passband frequencies are available. Please consult the factory.

### Features


- 6 MHz Bandpass
- High Stopband Attenuation
- 50  $\Omega$  Source and Load
- SMA Connectors

## Typical Performance

**Passband Amplitude & Group Delay**  
(0.5 dB/div and 100 nsec/div)

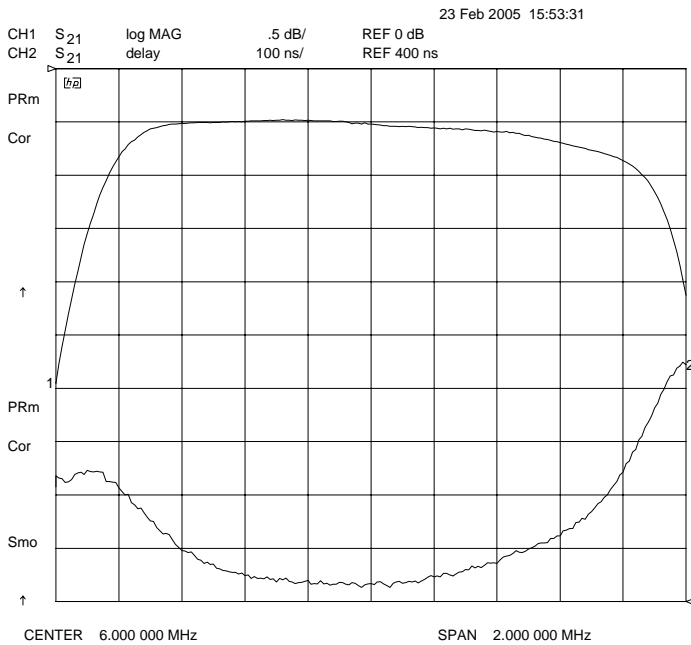

**Overall Response**  
(10 dB/div)

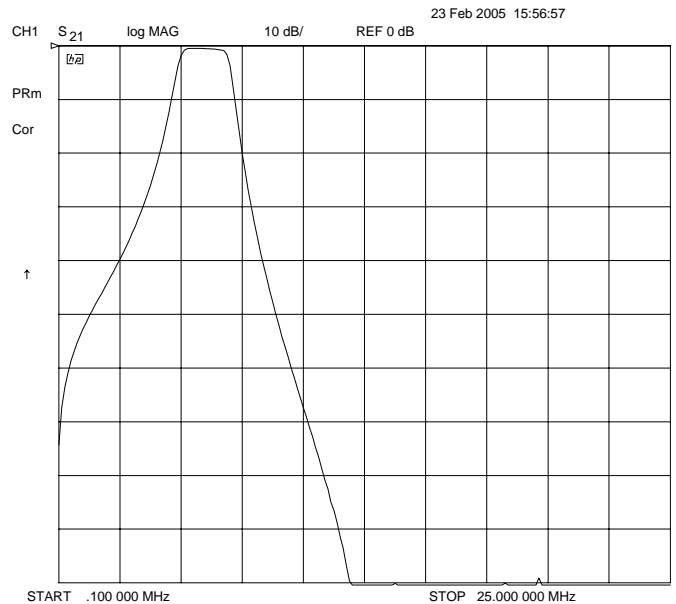

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2601 Bandpass

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	6 MHz
Insertion Loss	< 2 dB (0.7 dB Typical)
Typical 1 dB Bandwidth	1.8 MHz
Attenuation at 12 MHz	> 80 dB
Source & Load	50 Ω

## Physical Dimensions

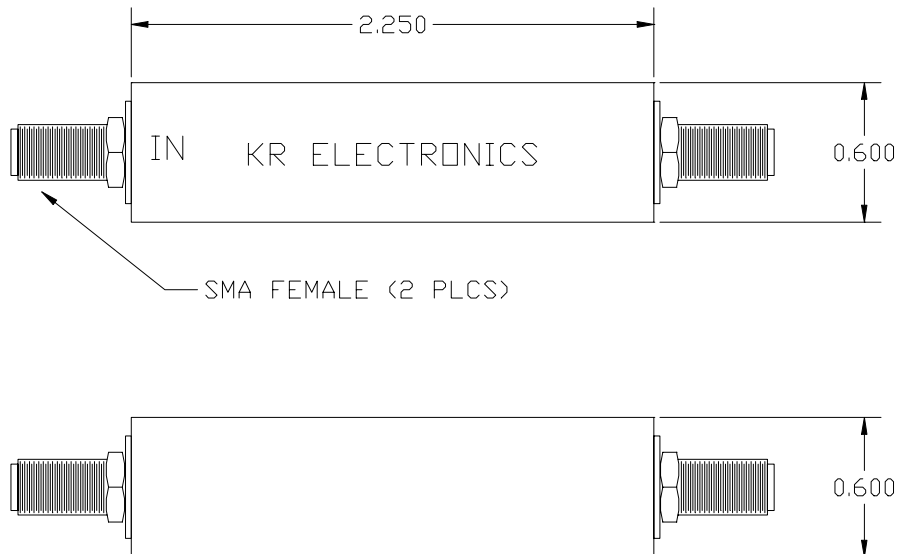

Dimensions shown in inches