

KR Electronics 2606 Notch Filter

General Description


KR 2606 is a 5 MHz notch filter. The filter is designed for 50 Ω source and load impedance. Other notch frequencies, bandwidths and impedances are available. Please consult the factory.

Features

- Notch Filter
- 50 Ω
- DIP Package

Typical Performance

Overall Response

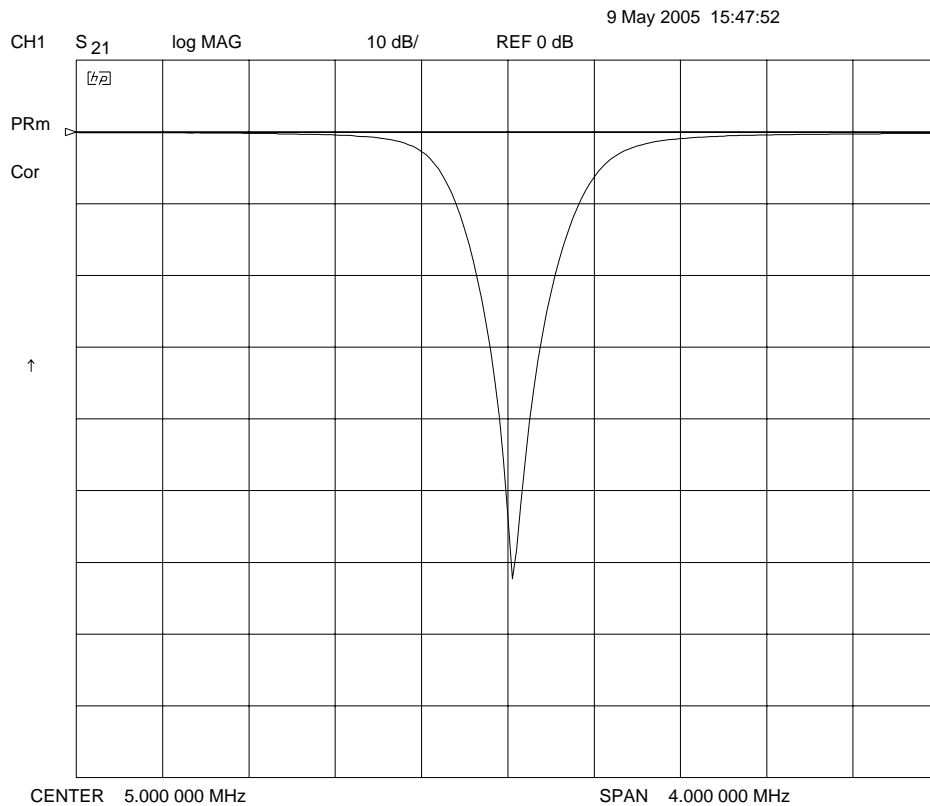


KR 2606

Specifications

Parameter	Specification
Filter type	Notch
Notch Frequency	5 MHz
Typical 3 dB Bandwidth	< 1 MHz
Source & Load	50 Ω

Physical Dimensions

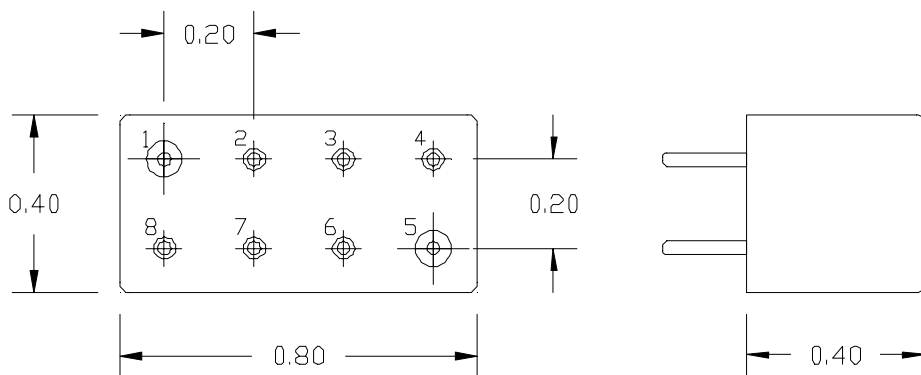

Metal Case
 Pin 1 is Input Pin 5 is Output
 All other Pins are Ground
 All leads .030" diameter
 Dimensions inches