

KR Electronics

General Description


KR 2869 is an 20 KHz bandpass filter. Other center frequencies can be specified.

Features

- 20 KHz center frequency
- 50 Ω

Typical Measured Performance

Overall Response

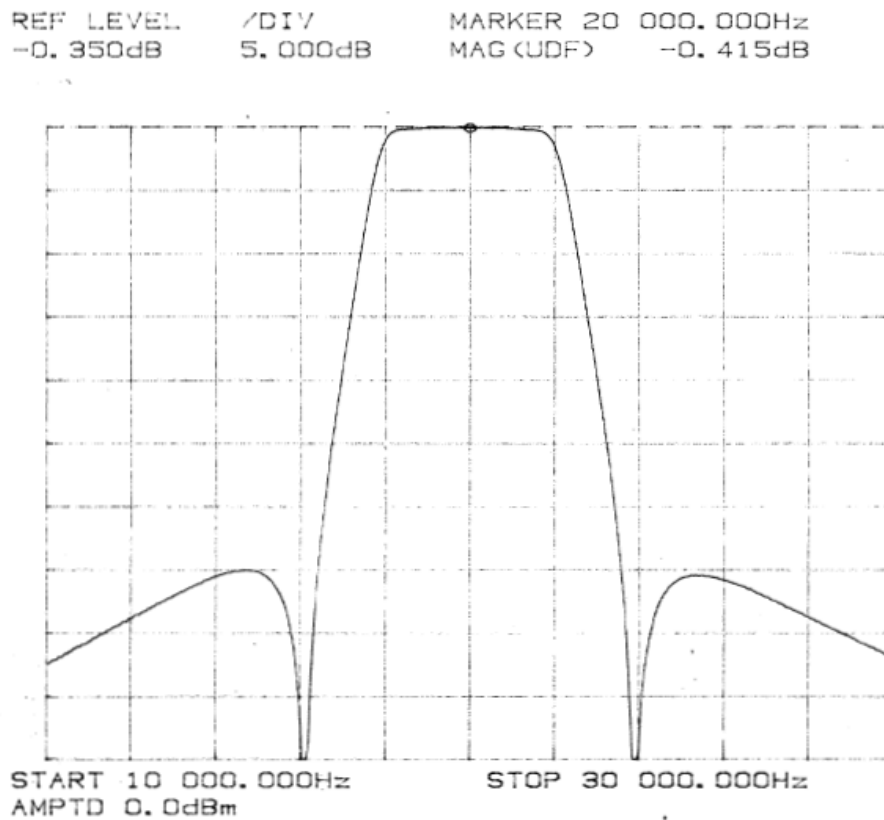

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2869 Bandpass Filter

Specifications

Parameter	Specification	Typical
Filter type	Bandpass	
Insertion Loss	< 2 dB	0.5 dB
Center Frequency	20 KHz	
Attenuation at 16.4 KHz	> 28 dB	35 dB
Attenuation at 18.2 KHz	< 2 dB	0.7 dB
Attenuation at 21.8 KHz	< 2 dB	0.7 dB
Attenuation at 23.6 KHz	> 28 dB	35 dB
Source and Load	50 Ω	Consult Factory for other

Physical Dimensions

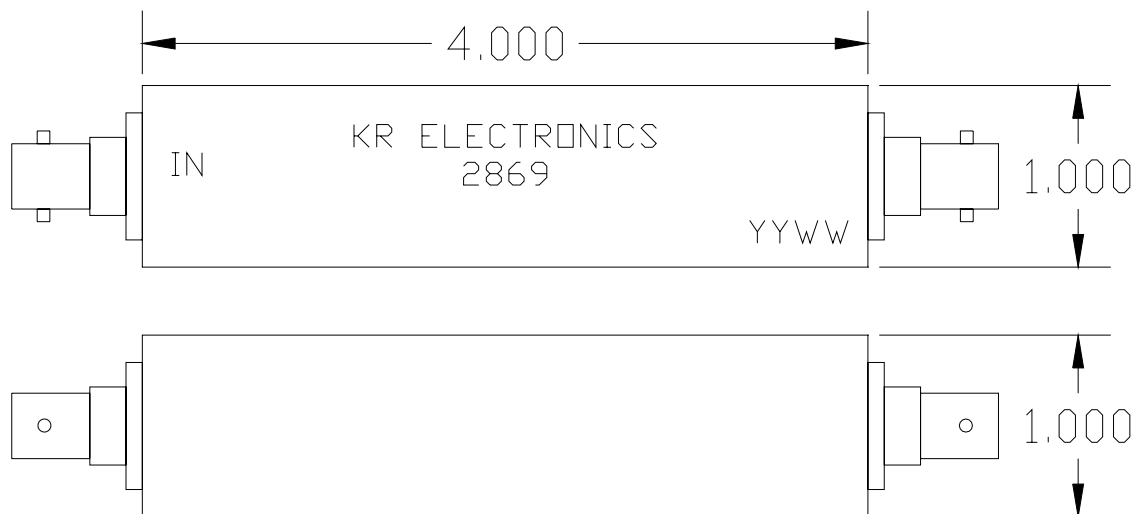

Notes:

1. Dimensions in inches
2. BNC(f) connectors input/output

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982