

KR Electronics

General Description

KR 2904 is an 1 KHz Notch filter. Other center frequencies can be specified.


Features

- 1 KHz center frequency
- 50 Ω

Typical Measured Performance

Overall Response

REF LEVEL 0.000dB /DIV 10.000dB MARKER 1 000.000Hz
MAG (UDF) -72.602dB

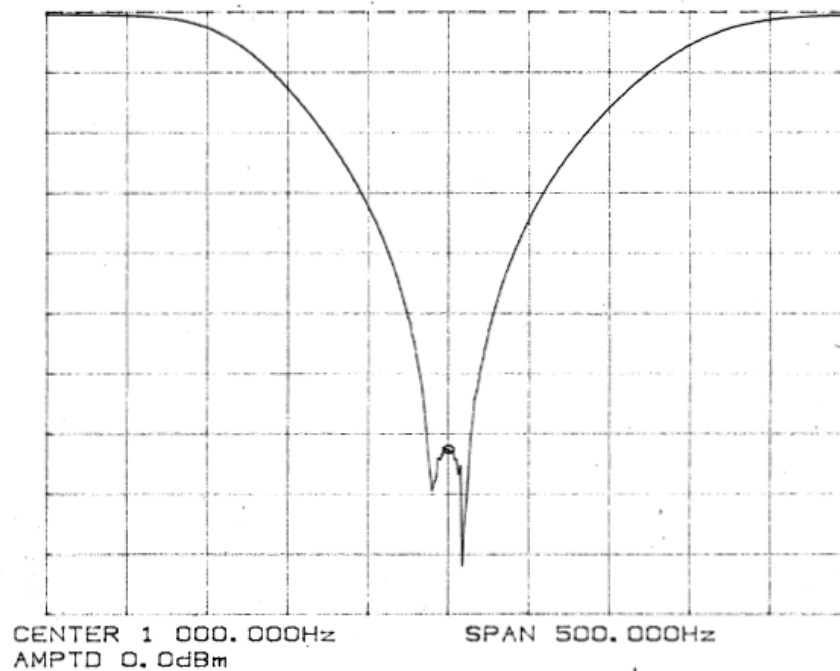

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2904 Notch Filter

Specifications

Parameter	Specification	Typical / Notes
Filter type	Notch	
Notch Frequency	1 KHz	
Rejection at Notch Frequency	65 dB	70 dB
3 dB Bandwidth		316 Hz
Upper 1 dB Frequency		1 MHz typical
Source and Load	600 Ω	Consult Factory for other

Physical Dimensions

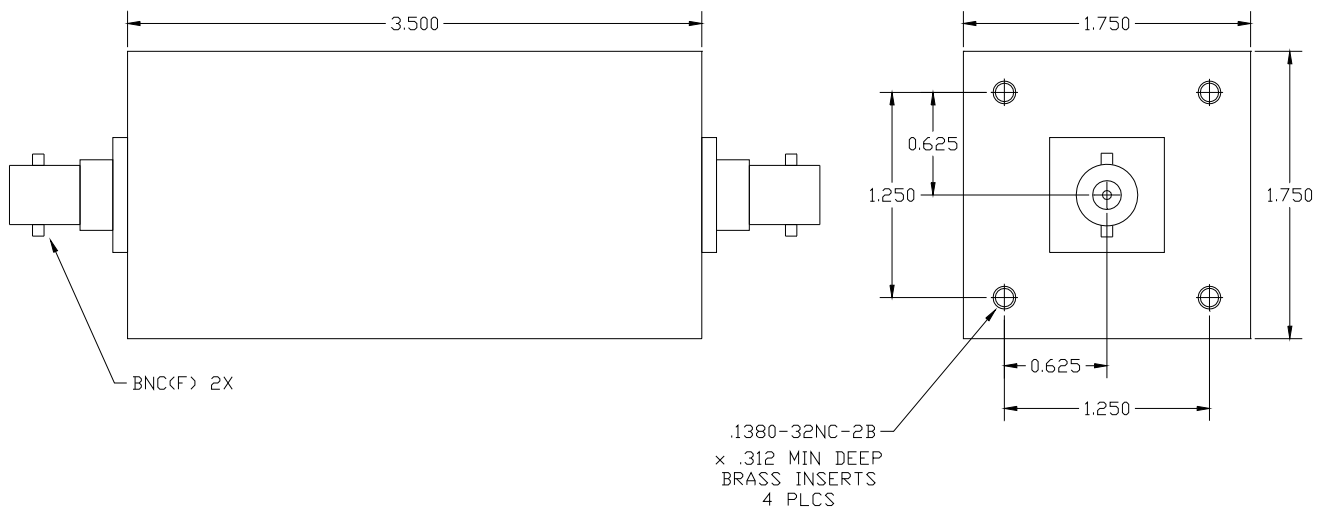

Notes:

1. Dimensions in inches
2. BNC(f) connectors input/output

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982