

## General Description


KR Electronics part number 3102-5 is a 5 MHz highpass filter. The filter attains over 50 dB by 0.75 MHz. Other bandwidths are available. Please consult the factory.

## Features

- 5 MHz Highpass Filter
- 50  $\Omega$  Source and Load
- BNC Connectors
- Also available in surface mount

## Typical Performance

**Overall Response**  
(10 dB/div)

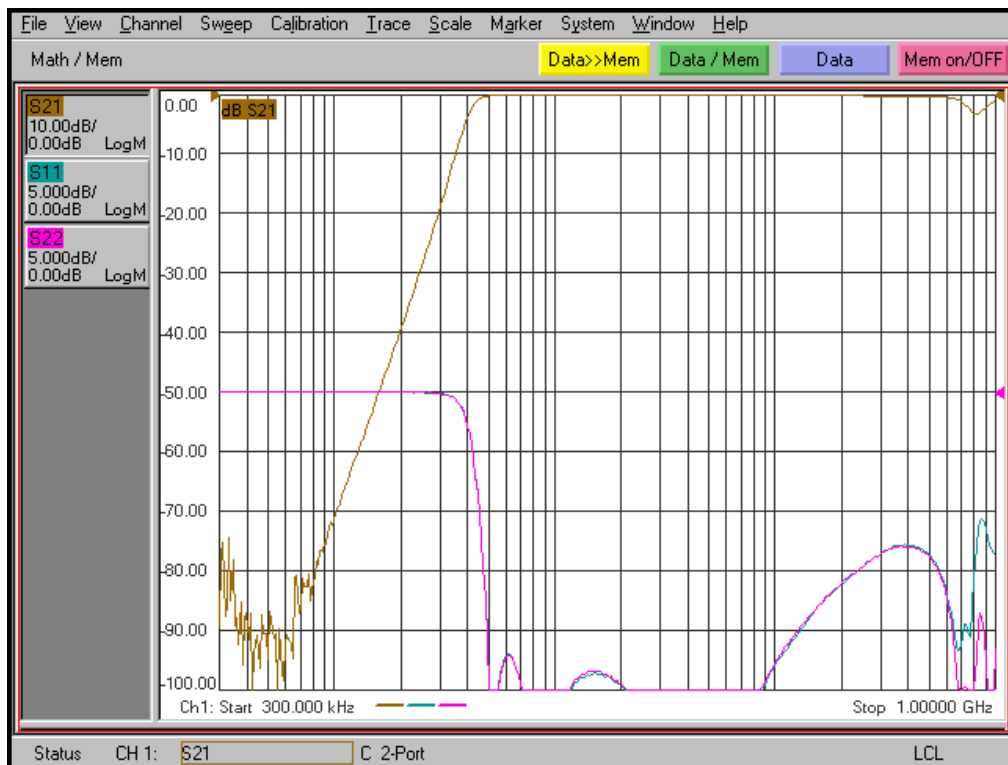


# KR Electronics, Inc. 3102-5

## Specifications

Parameter	Specification	Notes
Filter type	Highpass	
Start of Passband <1 dB	5 MHz	
Stopband Rejection dc to 0.75 MHz	50 dB min	75 dB typical
Source and Load	50 Ω	

## Physical Dimensions

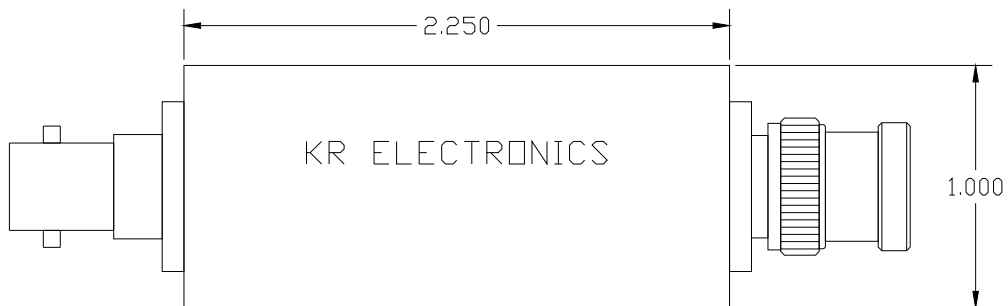

**Notes:**

1. Dimensions in inches
2. Rectangular case 1 x 1 2.25 inches
3. Connectors In/Out BNC(f)/BNC(m)