


# Bandpass Filter

KR 1905A-2


Passband Amplitude

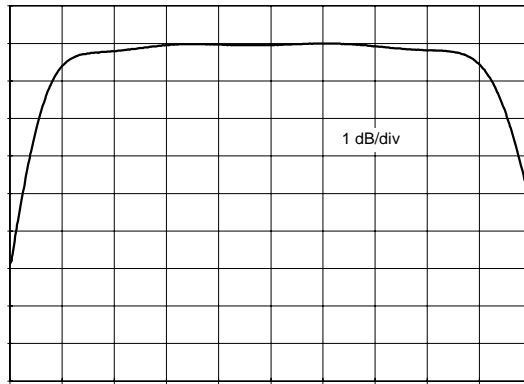

15 KHz

19.5 KHz

Overall Amplitude

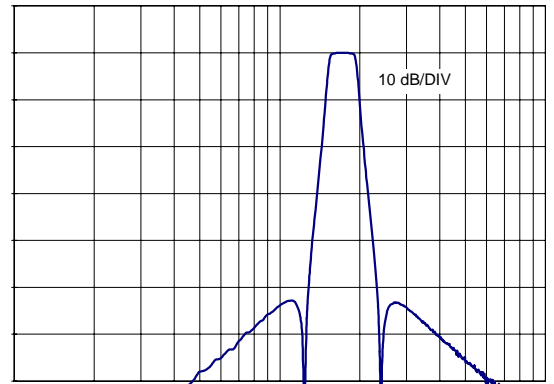


1 KHz

100 KHz

## Specifications

KR Part Number	1905A-2
Filter Type	Bandpass
Insertion Loss	< 6.6 dB
Lower / Upper Passband Frequencies	15.624 KHz / 18.856 KHz
Passband Loss	< 1 dB
Lower / Upper Stopband Frequencies	11.24 KHz / 23.24 KHz
Stopband Attenuation	> 40 dB
Source Impedance	100 $\Omega$
Load Impedance	1000 $\Omega$

## Outline Drawing

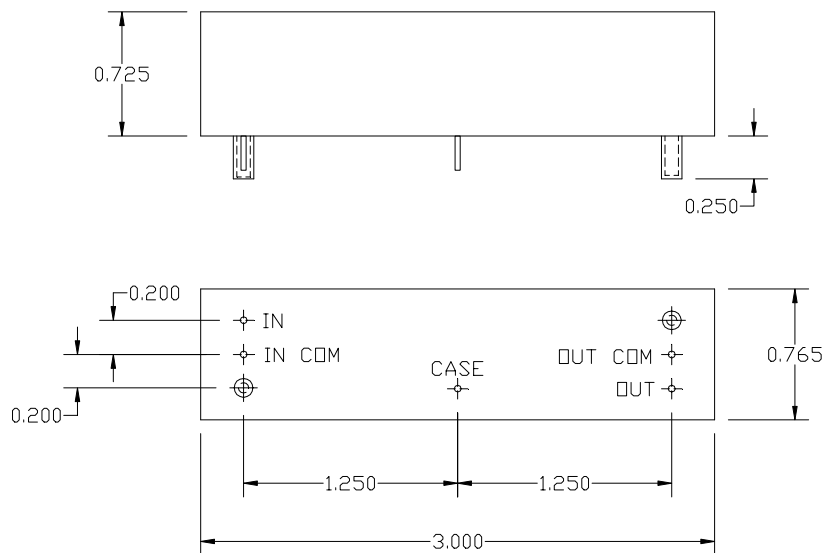

Terminals 0.03" diameter  
Metal Case  
Studs 4-40 UNC-2A (2 Plcs)

**KR Electronics**  
www.krfilters.com  
91 Avenel Street  
Avenel, NJ 07001  
732-636-1900