

# Inductor


KR Model  
2123A

## Inductor Model 2123A



### Specifications

Parameter	Test Condition	Value
<b>Inductance L13</b>	Measured from terminal 1 to terminal 3 with terminals 2 and 4 open, Frequency = 10 KHz, DC current 0 to 80 mA	4.0 mHy $\pm 5\%$
<b>Inductance L24</b>	Measured from terminal 2 to terminal 4 with terminals 1 and 3 open, Frequency = 10 KHz, DC current 0 to 80 mA	equal L13 $\pm 1\%$
<b>DC Resistance R13</b>	Measured from terminal 1 to terminal 3	2.0 $\Omega \pm 20\%$
<b>DC Resistance R24</b>	Measured from terminal 2 to terminal 4	2.0 $\Omega \pm 20\%$

### Outline Drawing



(TOP VIEW)

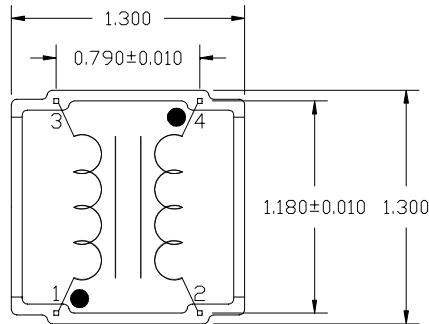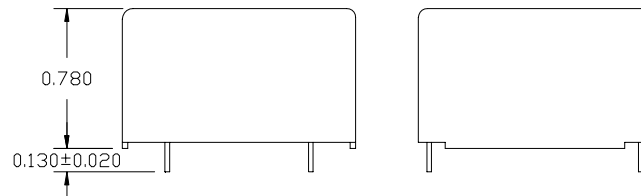

(BOTTOM VIEW)

**KR Electronics**  
www.krfilters.com  
91 Avenel Street  
Avenel, NJ 07001  
732-636-1900

Square leads 0.032" x 0.032"  $\pm 0.005$ "  
Lead length from seating plane 0.130"  $\pm 0.020$ "  
Tolerance unless noted  $\pm 0.020$ "