

# KR Series 2395 Bandpass Filter

## General Description

KR 2395 is a 70 MHz center frequency elliptic bandpass filters supplied in a surface mount package. The filter has high selectivity, symmetry and high stopband attenuation. Other center frequencies and bandwidths are available. Please consult the factory.

### Features

- 70 MHz center frequency
- Elliptic bandpass filter
- Surface mount package
- Excellent symmetry
- High stopband attenuation

## Typical Performance

**Passband & Group Delay**  
(1 dB/div & 10 nsec/div) 61.5 MHz to 78.5 MHz

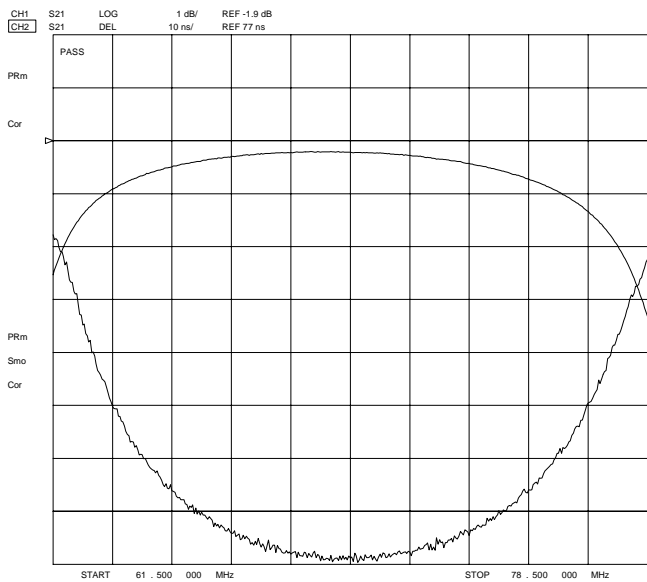


Figure 1

**Overall Response**  
(10 dB/div) Center 70 MHz Span 125 MHz

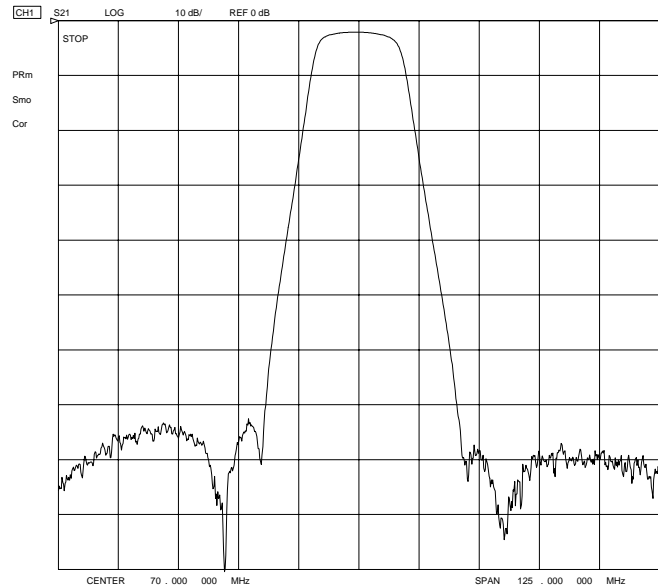


Figure 2

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

## KR Series 2395 Bandpass Filter

### Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency (fc)	70 MHz
1 dB Bandwidth (BW <sub>1dB</sub> )	12 MHz min
55 dB Bandwidth (BW <sub>55dB</sub> )	40 MHz max
Impedance	75 Ω

### Physical Dimensions

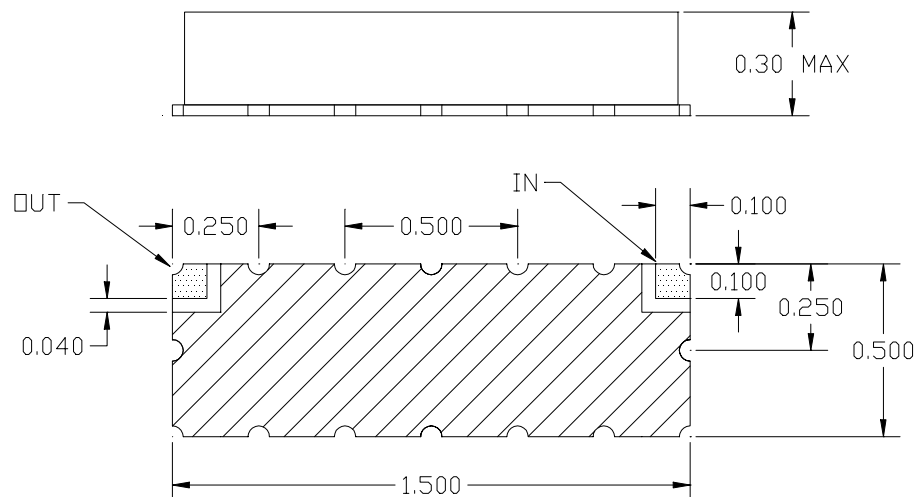

#### Notes:

1. Surface mount package — Metal cover, open frame
2. Dimensions in inches
3. Use SN60 or SN63 solder during installation
4. If boards are cleaned after installation, units must be completely dried to remove any entrapped moisture that will effect electrical performance