

# KR Electronics, Inc.

## General Description


KR 2571 is a 10 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 0.5 MHz and is designed for 50  $\Omega$  source and load impedance. Other center frequencies and bandwidths are available.

## Features


- 10 MHz Bandpass
- 50  $\Omega$
- BNC Connectors

## Typical Performance

**Passband Amplitude & Group Delay**  
(1 dB/div & 500 nsec/div)

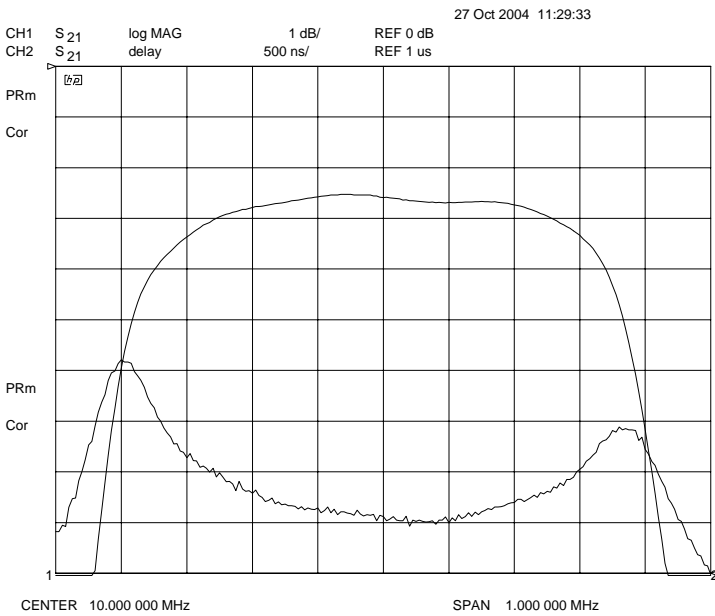

**Overall Response**  
(10 dB/div)

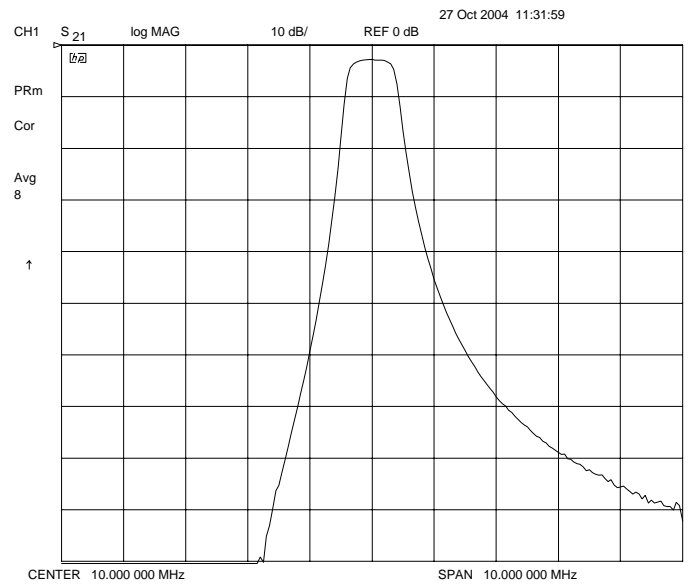

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2571

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	10 MHz
Insertion Loss	< 5 dB (2.8 dB typical)
Minimum 3 dB Bandwidth	0.5 MHz
Attenuation at 9 MHz	> 40 dB
Attenuation at 11 MHz	> 40 dB
Source & Load	50 Ω

## Physical Dimensions

