

KR Electronics 2598 Bandpass Filter

General Description


KR 2598 is a 15 MHz bandpass filters. Other passband frequencies are available. Please consult the factory.

Features


- 15 MHz Bandpass
- 50 Ω Source and Load
- SMA Connectors

Typical Performance

Passband Amplitude & Return Loss
(1 dB/div & 5 dB/div)

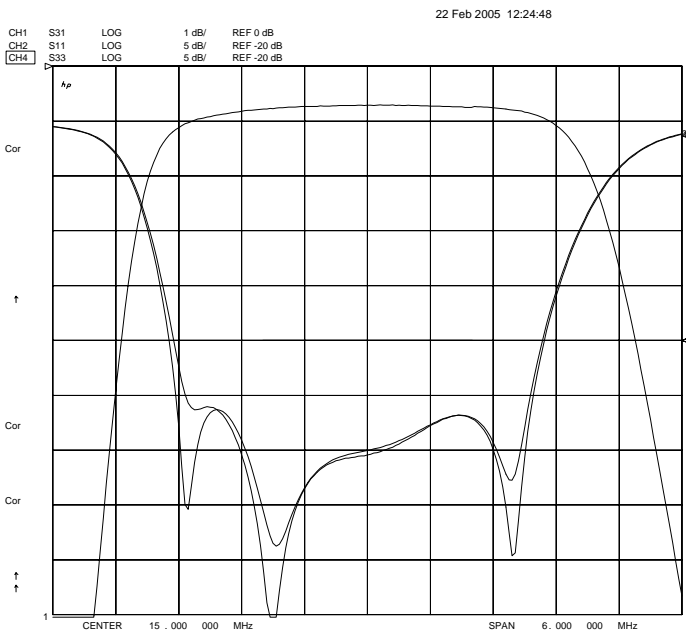

Overall Response
(10 dB/div)

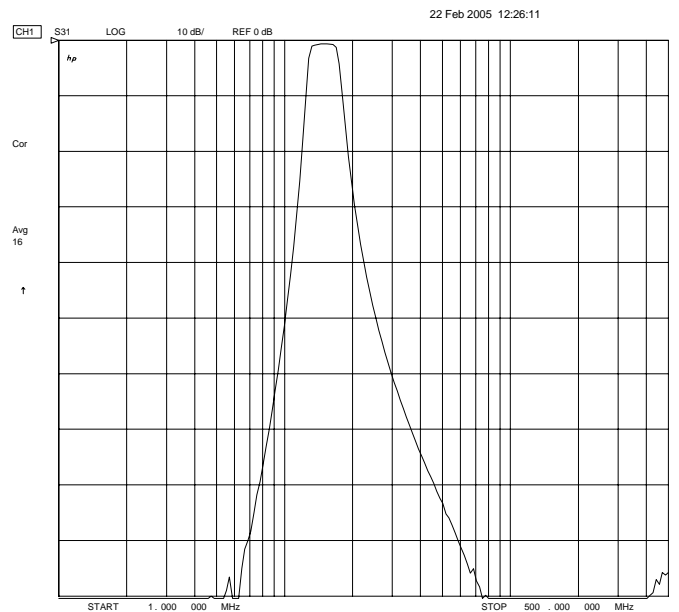

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2598 Bandpass

Specifications

| Parameter | Specification |
|--------------------------|------------------------|
| Filter type | Bandpass |
| Center Frequency | 15 MHz |
| Insertion Loss | < 3 dB (<1 dB Typical) |
| Minimum 0.5 dB Bandwidth | 2 MHz |
| Source & Load | 50 Ω |
| | |
| | |
| | |
| | |

Physical Dimensions

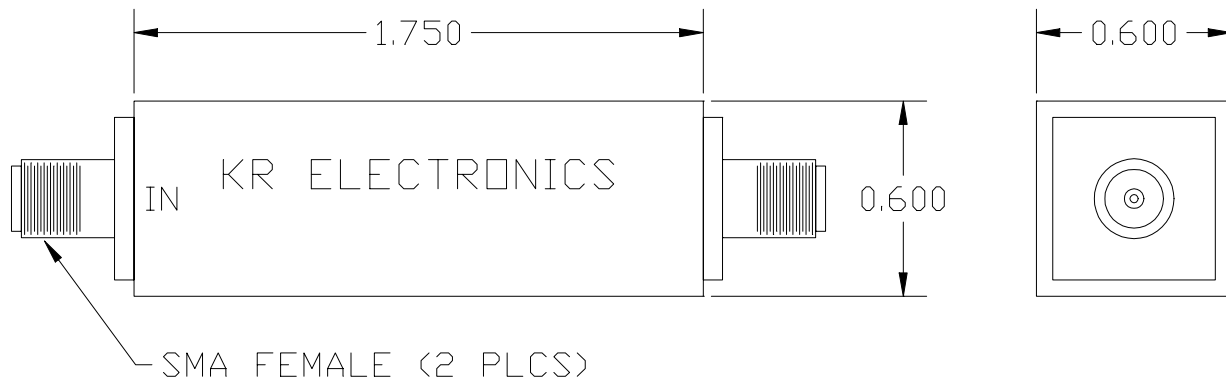

Dimensions shown in inches