

KR 2620 Bandpass Filter

General Description


KR 2620 is a 10 MHz bandpass filter. The filter has a 1 MHz 3 dB bandwidth and is designed for 300 Ω source and load impedance. Other passband frequencies, bandwidths and impedances are available. Please consult the factory.

Features


- 10 MHz Bandpass
- 300 Ω
- DIP Package

Typical Performance

Passband Amplitude
(1 dB/div)

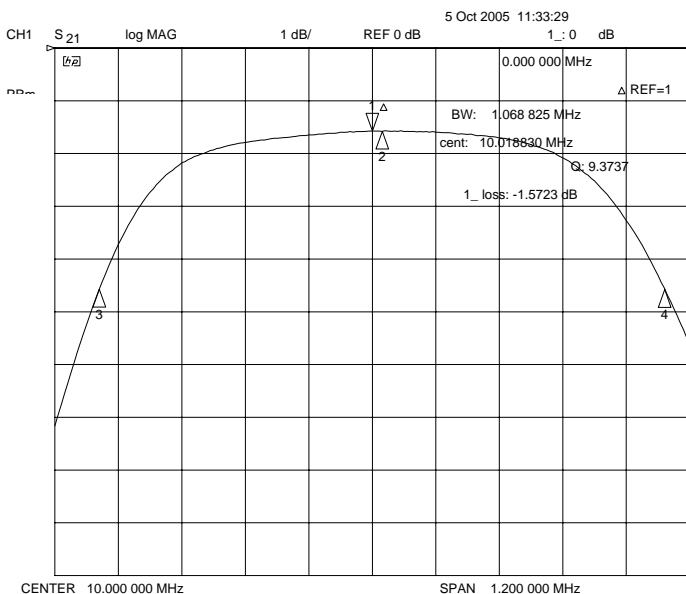

Overall Response
(10 dB/div)

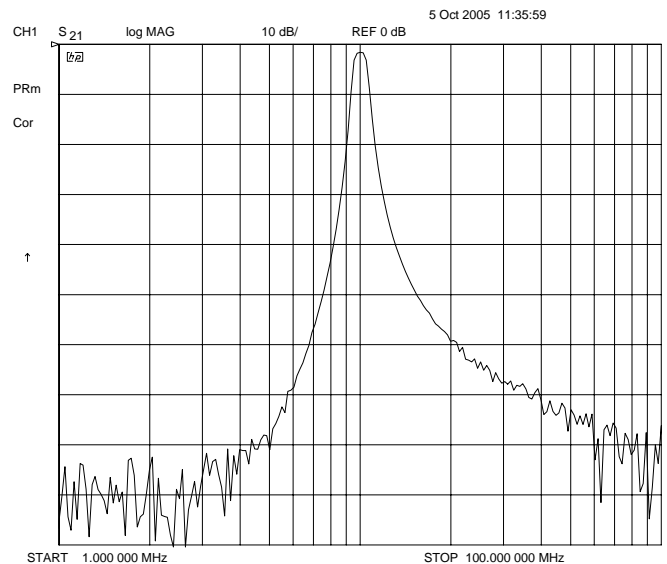

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2620

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	10 MHz
Insertion Loss	< 3.5 dB (< 2 dB typical)
3 dB Bandwidth	1 MHz Typical
Source & Load	300 Ω

Physical Dimensions

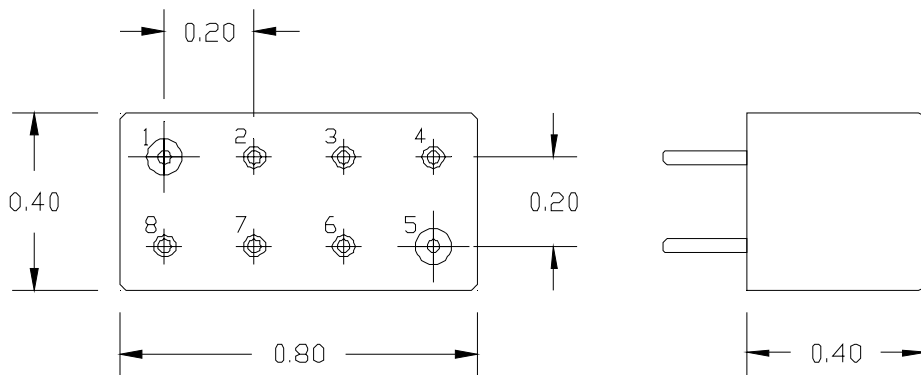

Metal Case
 Pin 1 is Input Pin 5 is Output
 All other Pins are Ground
 All leads .030" diameter
 Dimensions inches