

# KR 2624 Bandpass Filter

## General Description


KR 2624 is a 407 MHz bandpass filter. The filter has a minimum 16 MHz 3 dB bandwidth and is designed for 50  $\Omega$  source and load impedance. Other passband frequencies, bandwidths and impedances are available. Please consult the factory.

## Features


- 407 MHz Bandpass
- 50  $\Omega$
- DIP Package

## Typical Performance

**Passband Amplitude & Group Delay**  
(1 dB/div & 5 nsec/div)

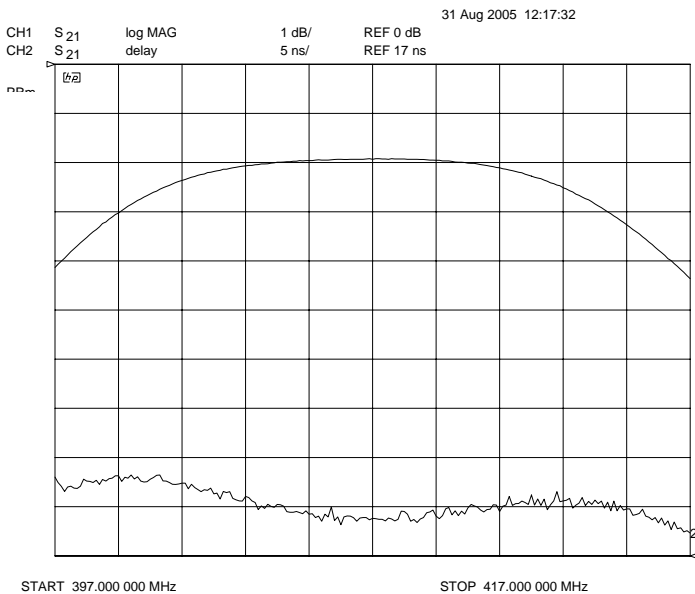

**Overall Response**  
(5 dB/div)

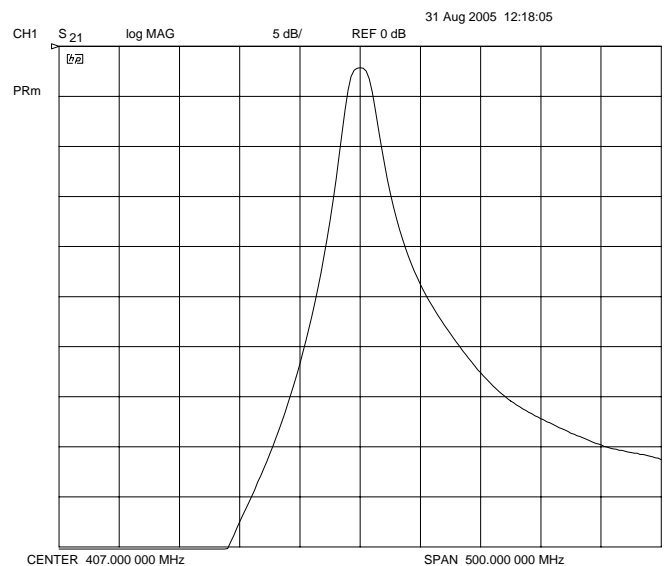

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2624

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	407 MHz
Insertion Loss	< 3 dB ( 2 dB typical)
3 dB Bandwidth	18 MHz minimum
Source & Load	50 Ω

## Physical Dimensions

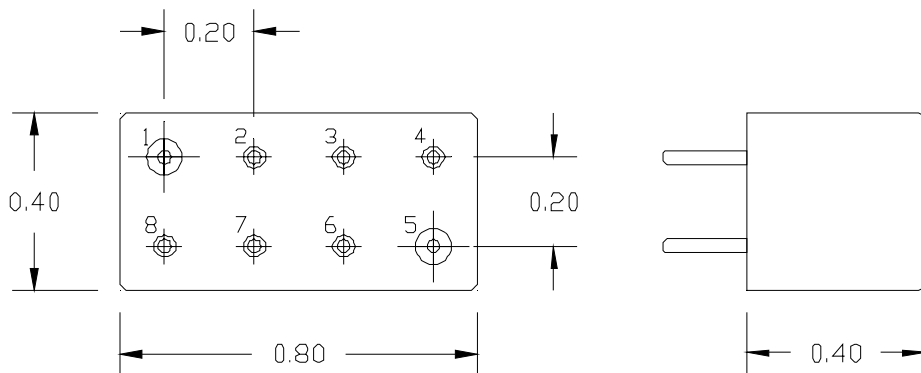

Metal Case  
 Pin 1 is Input Pin 5 is Output  
 All other Pins are Ground  
 All leads .030" diameter  
 Dimensions inches