# **KR Electronics**

#### **General Description**

KR 2758 is a 12 MHz modified bessel lowpass filter. The filter has constant delay and good transient characteristics. The 3 dB bandwidth is 12 MHz and the filter is designed for 50  $\Omega$  source and load impedance. Other passband frequencies, bandwidths and impedances are available. Please consult the factory.


#### **Features**

- 12 MHz modified Bessel
- Constant delay and linear phase
- Good transient characteristics
- 50 Ω
- DIP Package

### **Typical Performance**


#### Amplitude & Group Delay

(1 dB/div & 1 nsec/div)

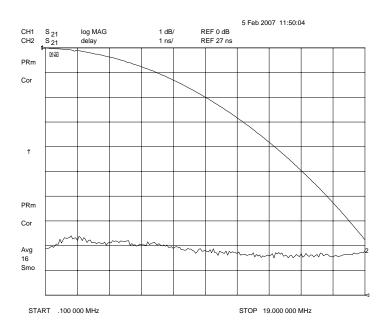

#### **Overall Response**

(10 dB/div)

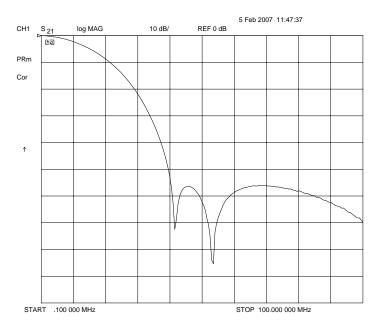


KR Electronics, Inc. 91 Avenel Street Avenel, NJ 07001 Webwww.krfilters.comEmailsales@krfilters.comPhone(732) 636-1900Fax(732) 636-1982

## **KR Electronics 2758**

#### **Specifications**

Parameter	Specification
Filter type	Lowpass
3 dB Bandwidth	12 MHz
Attenuation at 40 MHz	Approximately 50 dB
Constant Group Delay to	19 MHz
Source & Load	50 Ω

## **Physical Dimensions**

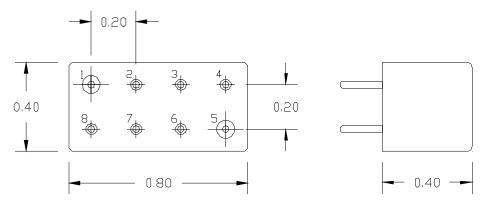

Metal Case
Pin 1 is Input Pin 5 is Output
All other Pins are Ground
All leads .030" diameter
Dimensions inches

KR Electronics, Inc. 91 Avenel Street Avenel, NJ 07001 Web www.krfilters.com Email sales@krfilters.com Phone (732) 636-1900 Fax (732) 636-1982