

KR Electronics

General Description


KR 2838-30-SMA is a 140 MHz group delay equalized bandpass filter. The filter has a passband from 125 MHz to 155 MHz. Other passband frequencies are available. Please consult the factory.

Features


- 140 MHz Center Frequency
- Sharp Transition to Stopband
- Group Delay Equalized
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div and 5 nsec/div)

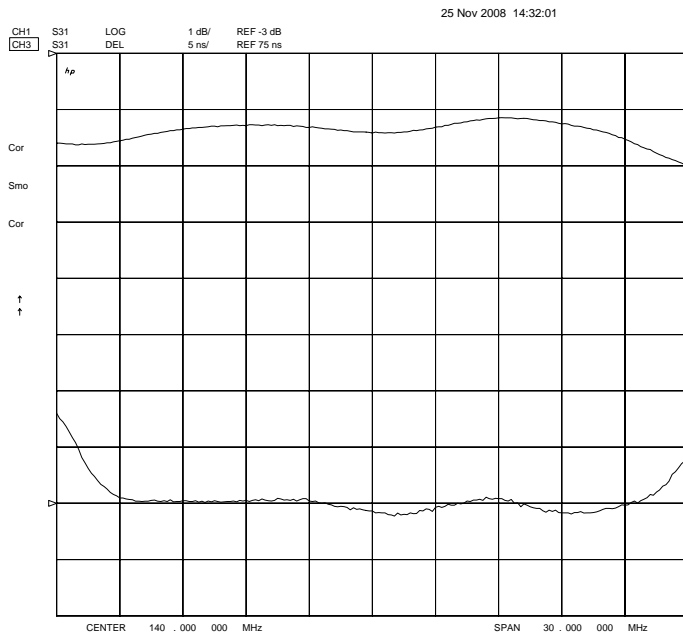

Overall Response
(10 dB/div)

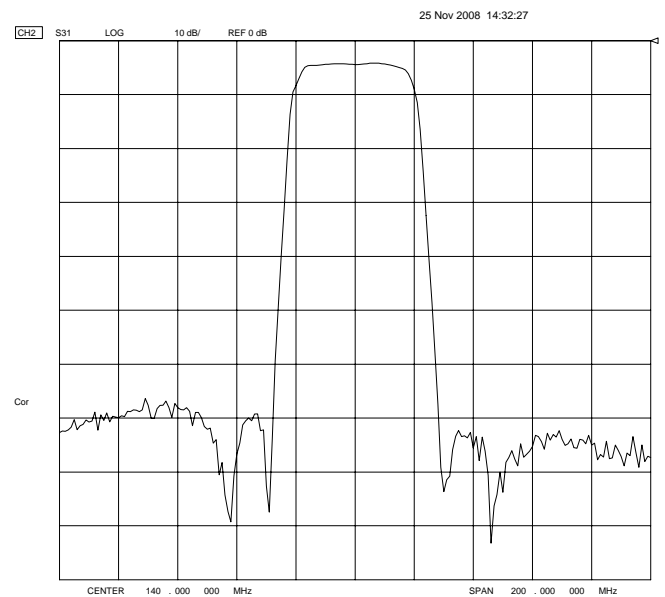

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2838-30-SMA

Specifications

Parameter	Specification
Filter type	Bandpass
Insertion Loss	< 5.5 dB (4.5 dB typical)
Passband (< 2 dB)	125 MHz to 155 MHz
Passband Ripple	< 1.5 dB
Passband Group Delay Ripple 128 MHz to 152 MHz	< 5 nsec
Attenuation at 113 MHz & 167 MHz	> 40 dB
Attenuation at 104 MHz & 176	> 55 dB
Source and Load	50 Ω

Physical Dimensions

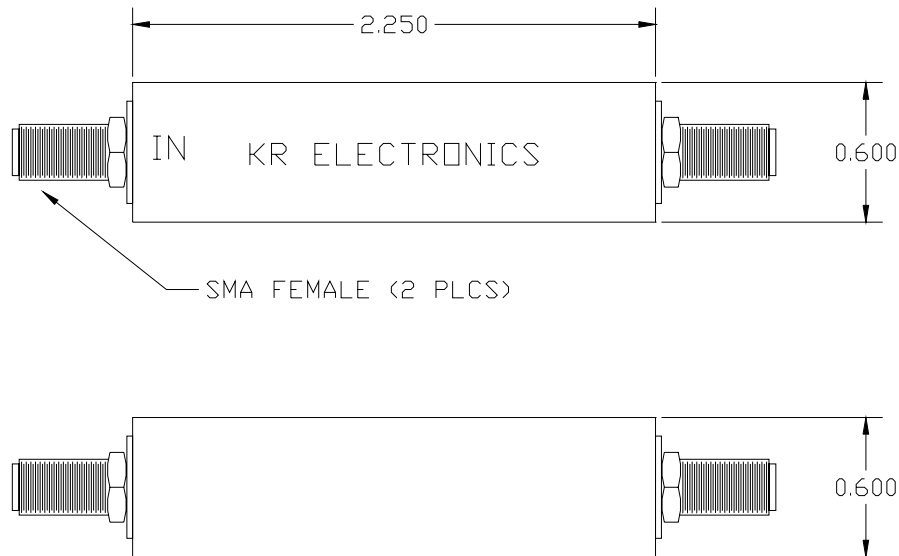

Dimensions in inches
 Metal Case
 Also available in surface mount

KR Electronics, Inc.
 91 Avenel Street
 Avenel, NJ 07001

Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982