

# KR Electronics, Inc.

## General Description


KR Electronics part number 2929 is an elliptic type lowpass filter. Other frequency are available.

### Features


- 1 MHz Cutoff Frequency
- Flat passband response
- Elliptic Type Response
- 50 Ω Source & Load

## Typical Performance

**Passband Response**  
(1 dB/div & 500 nsec/div)

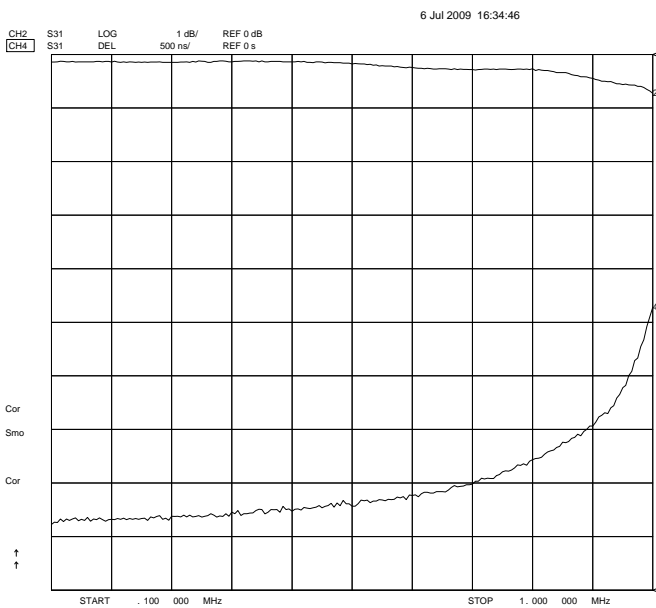

**Overall Response**  
(10 dB/div)

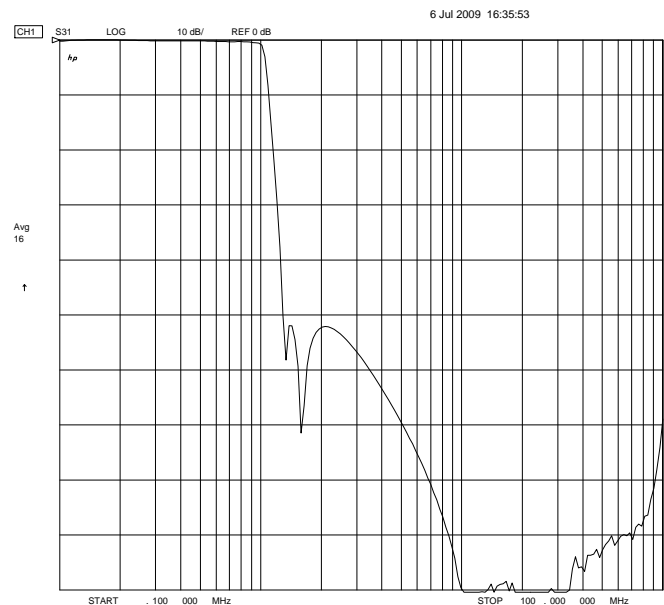

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2929

## Specifications

Parameter	Specification
Filter type	Lowpass
Insertion Loss	< 1 dB
End of Passband (< 1 dB)	1 MHz
Start of Stopband (> 45 dB)	1.3 MHz
Source and Load	50 Ω

## Physical Dimensions

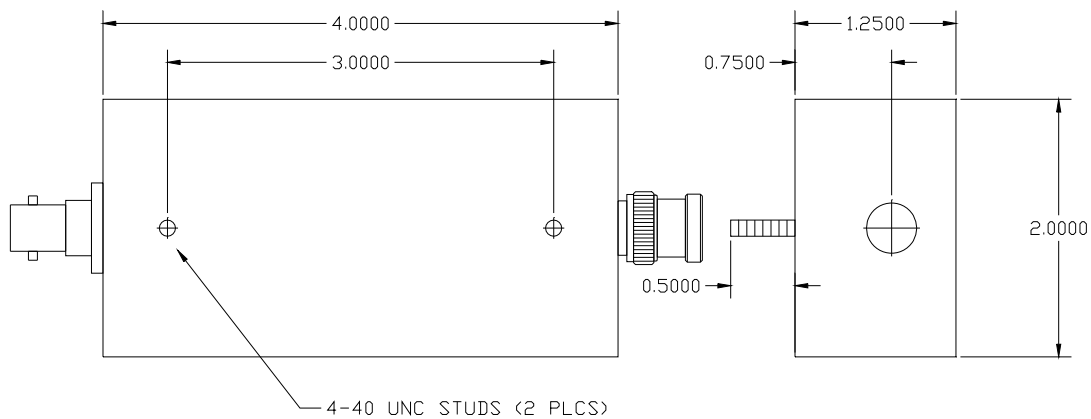

Dimensions in inches

BNC(F) to BNC(M) connectors

Other connector options and configurations available on request