KR Electronics, Inc.

General Description

KR Electronics part number 2961 is a 300 MHz group delay equalized lowpass filter. Other frequencies are available. Please consult the factory.

Features

- 300 MHz minimum 1 dB BW
- Sharp Transition to the Stopband
- Group Delay Equalized
- 50 Ω Source and Load
- Surface Mount

Typical Performance




Overall Response (10 dB/div)

KR Electronics, Inc.Webwww.krfilters.com91 Avenel StreetEmailsales@krfilters.comAvenel, NJ 07001Fax(732) 636-1982


KR Electronics

Typical Performance

Passband Amplitude & Group Delay (1 dB/div & 0.5 nsec/div)

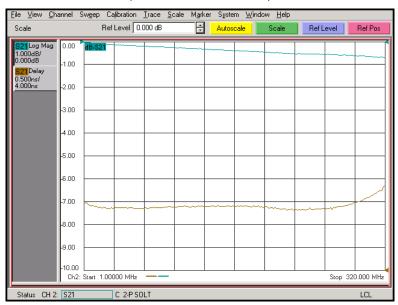

Overall Response (10 dB/div)

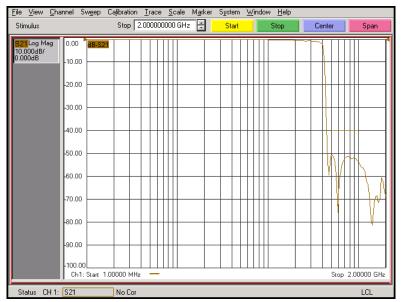

KR Electronics, Inc.Webwww.krfilters.com91 Avenel StreetEmailsales@krfilters.comAvenel, NJ 07001Fax(732) 636-1900


© 2010, KR Electronics, Inc. 2961, 300 MHz Lowpass, Rev 0, January 28, 2010

KR Electronics 2961

Specifications

Parameter	Specification
Filter type	Lowpass
End of Passband < 1 dB	300 MHz
Rejection 500 MHz to 1 GHz	40 dB min
Group Delay Variation to 280 MHz	0.20 nsec max
Source and Load	50 Ω

Physical Dimensions

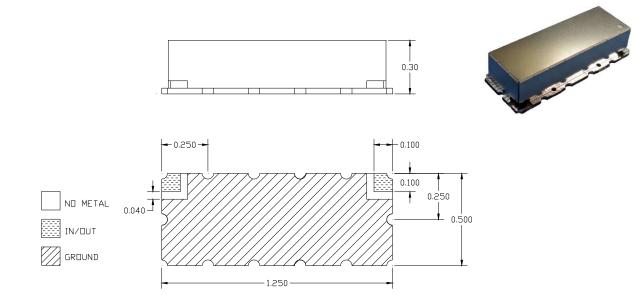

Notes:

- 1. Surface mount package
- 2. Dimensions in inches
- 3. Max reflow temperature 209° C for 10 sec
- 4. If boards are cleaned after installation units must be completely dried

KR Electronics, Inc. 91 Avenel Street Avenel, NJ 07001	Web Email Phone Fax	www.krfilters.com sales@krfilters.com (732) 636-1900 (732) 636-1982

© 2010, KR Electronics, Inc. 2961 , 300 MHz Lowpass, Rev 0, January 28, 2010