KR Electronics

General Description

KR Electronics part number 2978 is a 150 MHz elliptic type lowpass filter. The filter has over 70 dB rejection by 250 MHz. Other bandwidths are available. Please consult the factory.


Features

- 150 MHz Lowpass Filter
- Elliptic Type
- Sharp Transition to Stopband
- High Stopband Attenuation
- 50 Ω Source and Load
- Surface Mount
- Also available with SMA connectors

Typical Performance

Overall Response

(10 dB/div)

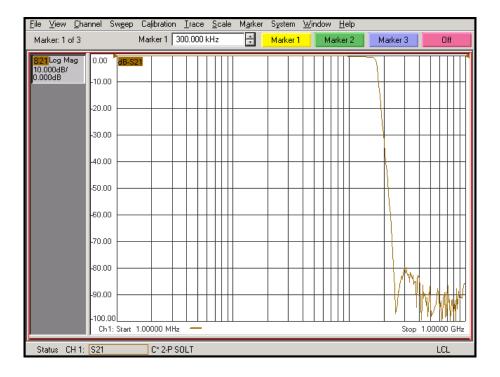


KR Electronics, Inc. 91 Avenel Street Avenel, NJ 07001 Web Email Phone Fax www.krfilters.com sales@krfilters.com (732) 636-1900 (732) 636-1982

KR Electronics

Typical Performance

Passband Amplitude & Group Delay

(1 dB/div & 10 nsec/div)

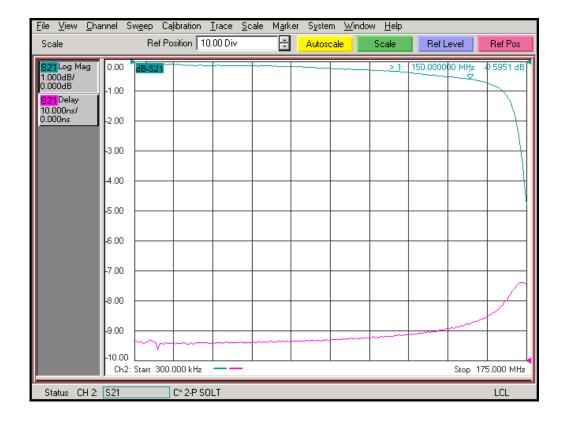


KR Electronics, Inc. 91 Avenel Street Avenel, NJ 07001 Web Email Phone Fax www.krfilters.com sales@krfilters.com (732) 636-1900 (732) 636-1982

KR Electronics 2978

Specifications

Parameter	Specification	Notes
Filter type	Lowpass	
End of Passand (< 1 dB)	150 MHz	0.6 dB typical
Rejection 250 MHz to 1 GHz	70 dB min	
Source and Load	50 Ω	

Physical Dimensions

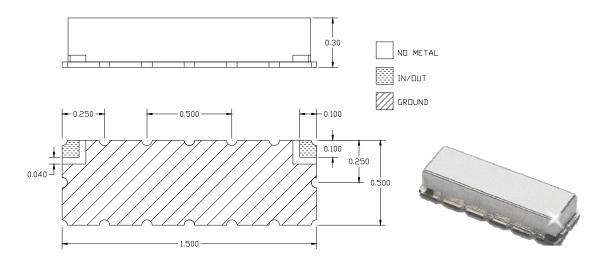

Notes:

- 1. Surface mount package, metal cover
- 2. Dimensions in inches
- 3. Max reflow temperature 209° C for 10 sec
- 4. If boards are cleaned after installation units must be completely dried
- 5. Also available in metal case with SMA connectors

 KR Electronics, Inc.
 Web
 www.krfilters.com

 91 Avenel Street
 Email
 sales@krfilters.com

 Avenel, NJ 07001
 Phone
 (732) 636-1982

 Fax
 (732) 636-1982