

KR Electronics, Inc.


General Description

KR Electronics part number 3441-1500+ is a 1500 MHz Linear Phase, Lowpass filter. Other frequencies are available. Please consult the factory.

Features

- 1500 MHz Lowpass Filter
- Linear Phase / Constant Delay
- Typical Stopband to 10 GHz
- 50 Ω Source and Load
- Miniature surface mount package 0.20" x 0.30" x 0.181"



Typical Performance

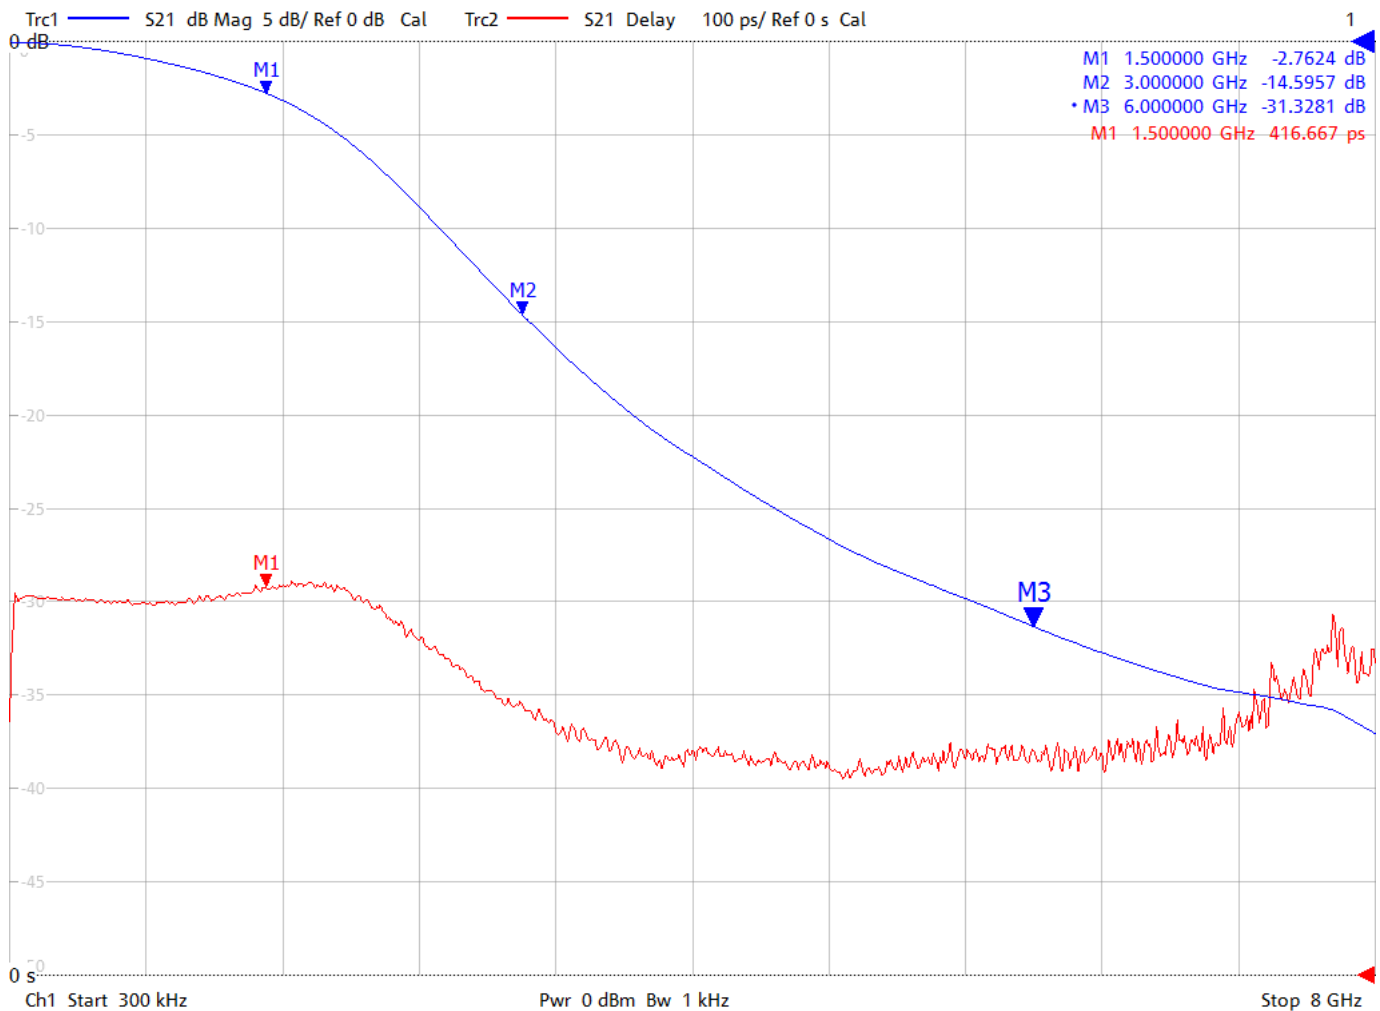

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

www.krfilters.com
sales@krfilters.com
(732) 636-1900

KR Electronics 3441-1500+

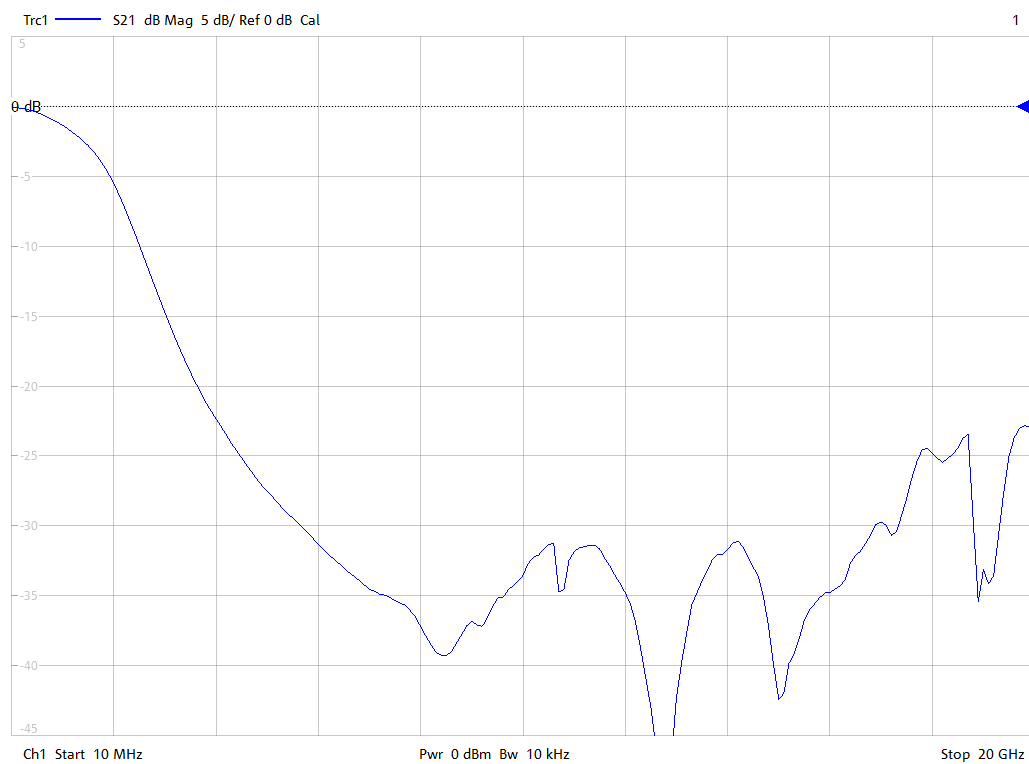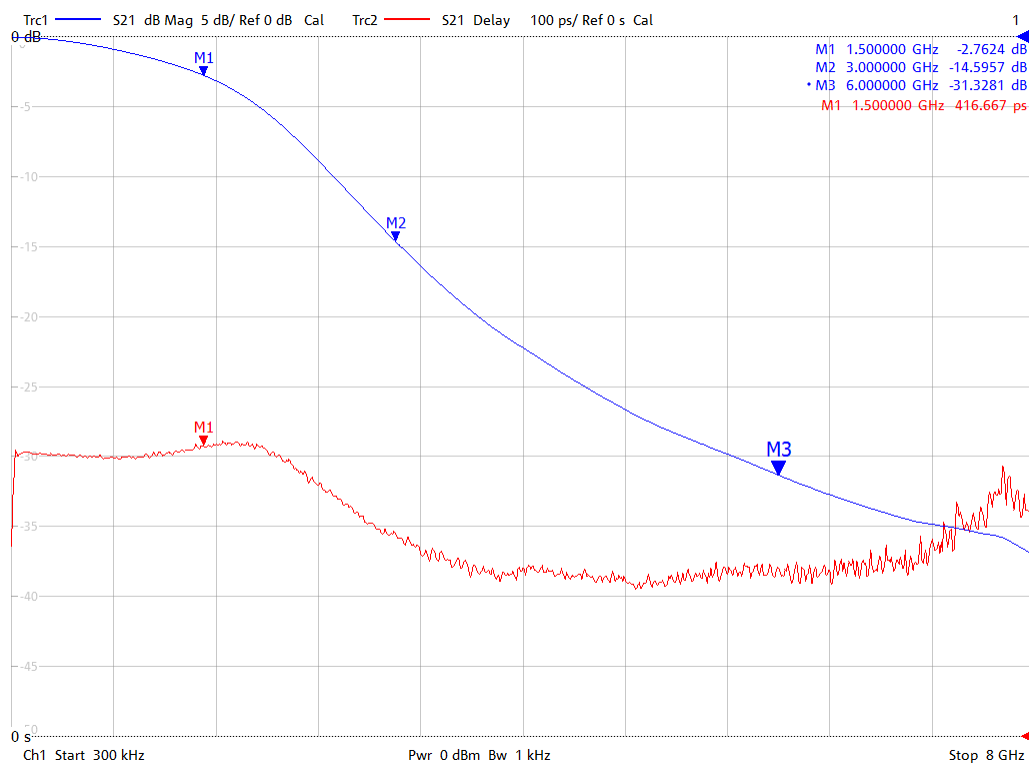

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001



www.krfilters.com
sales@krfilters.com
(732) 636-1900

KR Electronics 3441-1500+

Specifications

Parameter	Specification
Filter type	Lowpass
Passband 3 dB ± 1 dB	1500 MHz
Source and Load	50 Ω

Physical Dimensions

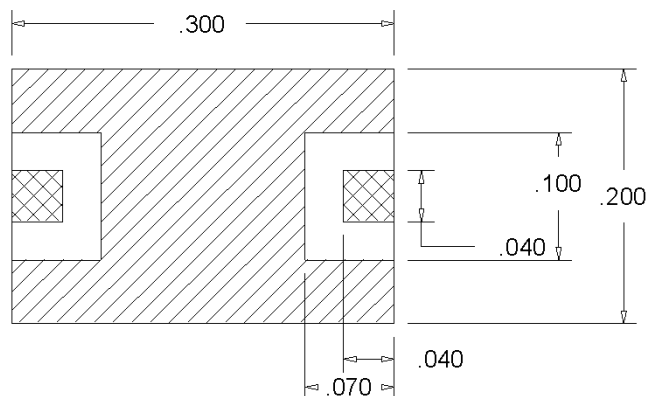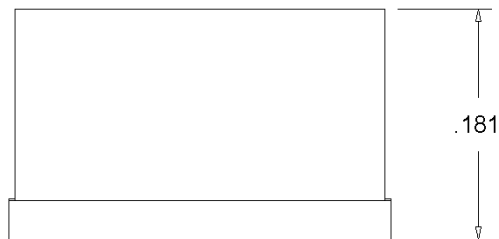

Notes:

1. Surface mount package
2. Dimensions in inches
3. Tolerance unless noted ± 0.010 "
4. Max reflow temperature 230° C for 10 sec
5. If boards are cleaned after installation units must be completely dried